

UPC: 019813512198



Color: White

Weight: 2.4 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

Type	Constant Current
120V	0.32A
208V	0.176A
240V	0.153A
277V	0.14A
Input Watts	31.60W

**LED Info**

Watts	33W
Color Temp	3000K (Warm)
Color Accuracy	90 CRI
L70 Lifespan	50,000
Lumens	3,035
Efficacy	96 LPW

**Technical Specifications****Listings****UL Listed & UL Classified:**

Suitable for wet locations

**ENERGY STAR V2.2:**

This product is ENERGY STAR® Version 2.2 Certified.

**Energy Star Model Number:**

DLC0023

**Energy Star ID:**

2350076

**California Title 24:**

Can be used to conform with the requirements of California Title 24 Part 6.

**Electrical****Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

**THDi:**

Produces less than 20% THD

**PF:**

≥0.9

**Input Voltage:**

120V through 277V

**Operating Frequency (Hz):**

50/60Hz

**LED Characteristics****Lifespan:**

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Wattage Equivalency:**

2 X 42W CFL

**R9 Value:**

High color performance with R9 greater than or equal to 50

**Flicker:**

Silent and flicker free operations of less than 30%

**Construction****IC Rated:**

Suitable for direct contact with insulation.

Type IC inherently protected, suitable for direct contact to air permeable insulation and cULus listed for damp locations.

Not for use in direct contact with spray foam insulation, consult NEMA LSD57-2013.

**Air Tight:**

Housing certified Air Tight as per ASTM E283

**Housing:**

Made from precision die-cast aluminum construction, dissipates heat from electrical components

**Cold Weather Starting:**

The minimum starting temperature is -30°C (-22°F)

**Maximum Ambient Temperature:**

Suitable for use in 40°C (104°F)

## Technical Specifications (continued)

### Construction

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Mounting:

Robust retention clips spring loaded tabs ensure the fixture is securely installed. Can be installed in 1/4" to 1 1/2" thick ceilings.

#### Lens:

Diffuse Polystyrene lens produces smooth uniform light that is glare free

### Finish:

Matte White

### Optical

#### Beam Angle:

90°±10°

### Other

#### Template:

Template included for easy ceiling cut out

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### Accessories:

**DLPLATE/T:** New Construction or Remodel Plate for T-Grid ceilings for use with 6" and 8" Models

**DLPLATE/SJ:** New Construction Plate for Stud/Joist mounting for use with 6" and 8" Models

**DL8-10GOOF/R/P:** 10" Goof Ring for 8" Commercial Downlight

**DL8-12GOOF/R/P:** 12" Goof Ring for 8" Commercial Downlight


### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
<b>CASE</b>	4	20.47	13.58	10.33
<b>PALLET</b>	224	9.63	9.63	85.04

## Dimension

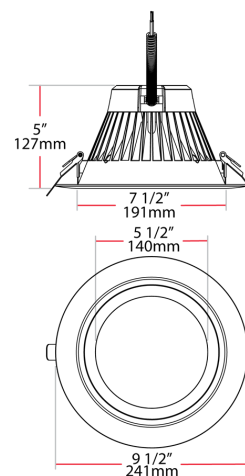

## Features

High Performance LEDs for commercial applications  
 Replacement for traditional compact fluorescent recessed downlights  
 Compatible with new construction or retrofit installations  
 UL wet and Energy Star rated  
 Meets air-tight requirements  
 Matte white smooth trim finish  
 Available in 3 color temperatures: 3000K, 3500K, 4000K  
 0 - 10V dimmable  
 Spring loaded retention clips  
 25-inch Flexible conduit  
 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish
C	8	R	33	930	UNV	W
	6 = 6" 8 = 8"	R = Round	12 = 900lm-1050lm 18 = 1500lm-1700lm 24 = 2000lm-2300lm 33 = 3000lm-3500lm	940 = 90 CRI, 4000K (Neutral) 935 = 90 CRI, 3500K (Warm Neutral) 930 = 90 CRI, 3000K (Warm) 840 = 80 CRI, 4000K (Neutral) 835 = 80 CRI, 3500K (Warm Neutral) 830 = 80 CRI, 3000K (Warm)	UNV = 120-277V (0-10V Dimming)	W = White