



Sigalux

MR 16



36° 3000K

Diameter	Footcandles
2	127
4	32
6	14
7	8
9	5




Degree	Candela
0	1180
5	1126
15	709
25	270
35	77
45	26



SPECIFICATIONS

6.5 Watts
 350 - 450 - 360 Lumens
 CRI 80
 3000K-4000K-5000K-6500K
 120V
 Dimmable
 Damp Rated
 Power Factor 0.9
 Warranty is 3 years
 Temperature -4 to 104°F
 Suitable for use in totally enclosed fixture
 Rated at 25000 hours

LAMP DIMENSION

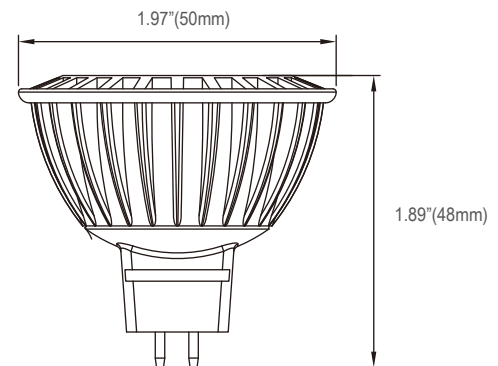

Technical Specification

MR • DIRECTIONAL - MR16 • 350/450/360 lm • G

Type	Voltage	Wattage	Base	CBCP	Light Output	Color temp.	CRI	Beam angle	Equal	SKU Code
	(v)	(w)		(cd)	(lm)	(k)	(Ra)		(w)	
MR16	12	6.5	GU5.3	1180	350	3000	80	36	20	MR1636D3000KGU5.3P
MR16	12	6.5	GU5.3	1300	350	4000	80	36	20	MR1636D4000KGU5.3P
MR16	12	6.5	GU5.3	1720	450	5000	80	25	20	MR1625D5000KGU5.3P
MR16	12	6.5	GU5.3	1840	360	6500	80	25	20	MR1625D6500KGU5.3P