

LED PAR30LN

Dimmable / Replaces 75W Halogen

Benefits:

- Brings out the beauty and enhances color in products and architectural features
- Will not fade colors (No UV Light)
- Long life = Low maintenance costs
- Low heat generation – great for temperature-sensitive display lighting
- Dynamic reds and natural skin tones
- Even, consistent dimming down to 5%
- High lumen output without the additional hassle and expense of an external ballast

Features:

- Exceptional color rendering – CRI 93 options
- Available in Narrow Flood and Flood beam angles
- High efficacy rate – 85 LPW for 3000K
- RoHS compliant with no lead or mercury
- This device complies with part 15 of the FCC Rules
- Suitable for use in totally enclosed fixture

Energy Usage	11/12 Watts
Lumens	850
CRI	93/83
R9/R13 Value	up to 68/95
CCT	2700/3000/5000K
Beam Angles	25°/40°
Efficacy	up to 85 LPW
Base Type	E26
Voltage	120V
Dimming	TRIAC
Classification	Damp Rated
Operating Temperature	-4 to 104°F
Power Factor	0.9



Applications:

- Track lighting
- General lighting
- Recessed downlighting
- Accent/Display lighting
- Great for galleries, retail, hospitality, restaurants, offices, and other commercial segments



Color:

- Strict LED binning for consistent CCTs across all lamps
- Available in 2700K, 3000K & 5000K CCT
- High CRI 93
- High R9 68 (Reds)
- High R13 95 (Skin Tones)

For 2700 & 3000 CCT




5 YEAR
WARRANTY

LIFE: **25,000 HOURS**




LED PAR30LN

ILLUMINANCE & CANDELA DISTRIBUTION




25° | 3000K

Diameter	Footcandles
1.1	442
2.2	110
3.2	49
4.3	28
5.4	18




40° | 3000K


Diameter	Footcandles
2	214
4	54
6	24
8	14
10	9



Degree	Candela
0	4120
5	3089
15	1148
25	483
35	170
45	29



Degree	Candela
0	2000
5	1710
15	1013
25	353
35	57
45	30

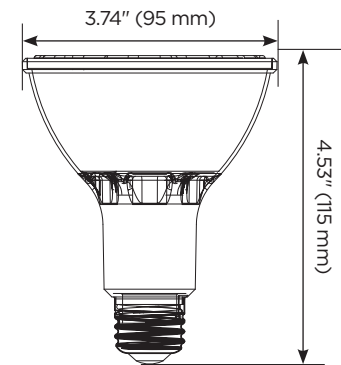

Weight: 0.29 lb / 130 g

Type	Voltage (V)	Wattage (W)	Base	CBCP (cd)	Light Output (lm)	Color Temp. (k)	CRI (Ra)	Beam Angle °	Equal (W)	Product Description	Product Number	Master Carton Quantity (PCS)
PAR30	120	11	E26	4070	850	2700	93	25	75	DPO511PAR30LNE26D927G125CB1W	1102050269	30
PAR30	120	11	E26	4120	850	3000	93	25	75	DPO511PAR30LNE26D930G125CB1W	1102050271	30
PAR30	120	12	E26	4180	850	5000	83	25	75	DPO512PAR30LNE26D850G125CB1W	1102050151	30
PAR30	120	11	E26	1950	850	2700	93	40	75	DPO511PAR30LNE26D927G140CB1W	1102050270	30
PAR30	120	11	E26	2000	850	3000	93	40	75	DPO511PAR30LNE26D930G140CB1W	1102050272	30
PAR30	120	12	E26	2050	850	5000	83	40	75	DPO512PAR30LNE26D850G140CB1W	1102050144	30