

LED HO PAR38

High Output, Non-Dimmable Replaces 250W Halogen

Benefits:

- Brings out the beauty in products and architectural features
- Will not fade colors (No UV Light)
- Long life = Low maintenance costs
- Low heat generation
- High lumen output without the additional hassle and expense of an external ballast
- Wet Location IP44 – protected against water splashing

Features:

- Great color consistency
- Available in Narrow Flood and Flood beam angles
- High efficacy rate – 100 LPW for 3000K
- RoHS compliant with no lead or mercury
- This device complies with part 15 of the FCC Rules
- Not suitable for use in totally enclosed fixture

Energy Usage	38 Watts
Lumens	4000
CRI	83
CCT	3000/4000/5000K
Beam Angles	25°/40°
Efficacy	up to 100 LPW
Base Type	E26
Voltage	120-277 V
Dimming	Non-Dimmable
Classification	Wet Rated
Operating Temperature	-4 to 104°F
Power Factor	0.9

5 YEAR
WARRANTY


LIFE: **50,000 HOURS**



* Sengled also has a 120V, dimmable LED HO PAR38

Applications:

- Indoor/Outdoor lighting
- Track lighting
- General lighting
- Recessed downlighting
- Accent/Display lighting
- Great for galleries, retail, hospitality, restaurants, offices, and other commercial segments

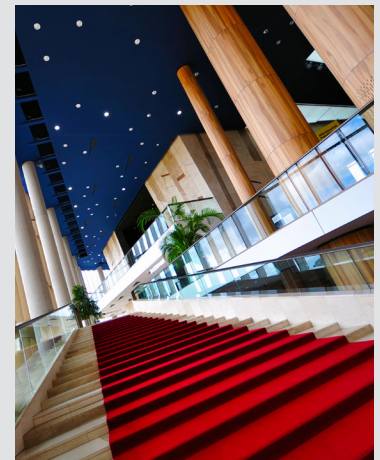

Color:


- Strict LED binning for consistent CCTs across all lamps
- Available in 3000K, 4000K and 5000K CCT
- CRI 83



LED HO PAR38


ILLUMINANCE & CANDELA DISTRIBUTION

25° | 3000K




Diameter	Footcandles
1.0	2178
2.1	545
3.1	242
4.1	136
5.2	87


40° | 3000K




Diameter	Footcandles
1.9	1070
3.9	269
5.8	119
7.7	67
9.6	43



Degree	Candela
0	19800
5	18073
15	5343
25	1801
35	527
45	182



Degree	Candela
0	9600
5	9090
15	5829
25	1767
35	436
45	230

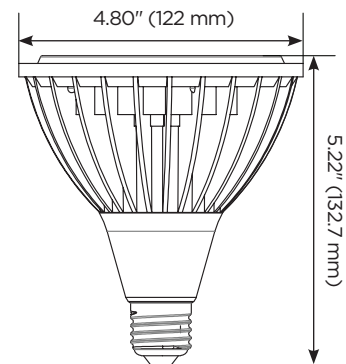

Weight: 1.28 lb / 580 g

Type	Voltage (V)	Wattage (W)	Base	CBCP (cd)	Light Output (lm)	Color Temp. (k)	CRI (Ra)	Beam Angle °	Equal (W)	Product Description	Product Number	Master Carton Quantity (PCS)
HO PAR38	120-277	38	E26	19800	4000	3000	83	25	350	DP0838PAR38E26ND830G125CB1W	1102060489	8
HO PAR38	120-277	38	E26	19850	4000	4000	83	25	350	DP0838PAR38E26ND840G125CB1W	1102060490	8
HO PAR38	120-277	38	E26	9600	4000	3000	83	40	350	DP0838PAR38E26ND830G140CB1W	1102060491	8
HO PAR38	120-277	38	E26	9650	4000	4000	83	40	350	DP0838PAR38E26ND840G140CB1W	1102060492	8
HO PAR38	120-277	38	E26	19900	4000	5000	83	25	350	DP0838PAR38E26ND850G125CB1W	1102060533	8
HO PAR38	120-277	38	E26	9700	4000	5000	83	40	350	DP0838PAR38E26ND850G140CB1W	1102060534	8