

DESCRIPTION

CATALOG: E-750-F-260-LP-SC	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS - LAMP TYPE: 1 or 2 - F72T12, F96T12/SS
--------------------------------------	------------------------------------	--	---

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 V~ ±10%	LAMP WATTS: 55/60 w	INPUT WATTS: 75 w	INPUT CURRENT: 0.65 A	OCV: 650 v	PF: > 0.90	FREQUENCY: 50/60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.61	BEF: 0.81	LAMP CONNECTION: PARALLEL	THD (1): < 25%	NO PCB'S

(1) FOR 2-F96T12

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.22	8.90	8.35	1.70	9.50	1.18
	TOL(+/-)	0.01	0.01	0.01	0.05	0.05	0.05
	MM	31	226	212	43	241	30
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE			
INCHES	69.5	69.5	50.5	50.5			
TOL(+/-)	3/8	3/8	3/8	3/8			
MM	1765	1765	1282	1282			
TOL(+/-)	10	10	10	10			

CARTON CHARACTERISTICS

UNITS/CARTON 20	CARTONS/LAYER 12	# OF LAYERS 7	UNITS/PALLET 1680	PIECE WEIGHT 1.3 lbs	CARTON WEIGHT 27 lbs	PALLET WEIGHT 2,345 lbs
CARTONS/PALLET 84	CARTON DIMENSIONS 12.75" x 12.00" x 4.50"		PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 39"		

MISC.



CARTON LABEL

ISB SOLA BASIC

CAT. E-750-F-260-LP-SC

FOR: 1 OR 2 F96T12/SS, F72T12


120 V
0.65 A
50/60 Hz

20 UNITS

INSTANT START ELECTRONIC BALLAST

UL LISTED SP49, CSA, LR106469, MADE IN MEXICO, ISO 9001

ELECTRICAL DIAGRAM

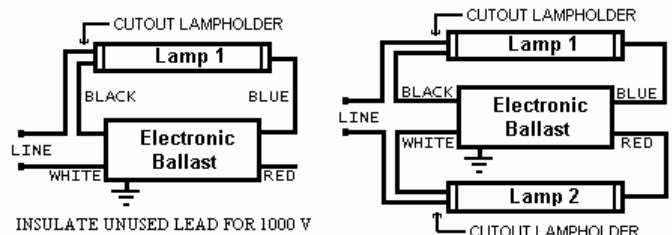

PRODUCT LABEL

SOLA

120 V~ 0.65 A 650 OCV 50/60 Hz

VOLTAGE TO GROUND < 600 V~

FOR 1 OR 2: F96T12/SS, F72T12

INSTANT START ELECTRONIC BALLAST

E-750-F-260-LP-SC

CLASS P INHERENT THERMAL PROTECTION

TYPE 1 OUTDOOR TYPE HL

851-084011

3 YEAR WARRANTY, UL LISTED SP49, LR106469, NO PCB'S, MINIMUM 0°C, MADE IN MEXICO

GROUND BALLAST CASE MOUNT LAMPS WITHIN 3/4" OF GROUND METAL REFLECTOR. INSTALL IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODE.

CAUTION: HAZARDOUS VOLTAGE. DISCONNECT LINE VOLTAGE BEFORE INSTALLING OR REPLACING. INSULATE UNUSED LEAD FOR 1000 V.

B12



Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.



ISB LIGHTING & POWER SOURCE
 2840 KELLER SPRINGS ROAD,
 SUITES 1102 AND 1103
 CARROLLTON, TX. 75006
 U.S.A.
 Tel. 972-416-4500
 Fax. 972-418-5858