

QUICKTRONIC® PROStart® T5HO Universal Voltage Systems



Type CC
Programmed Rapid Start
Normal Ballast Factor

Professional Series

QTP T5HO PSN

Lamp / Ballast Guide

54W T5 – PENTRON® HO lamps

1-lamp QTP1x54T5HO/UNV

2-lamp QTP2x54T5HO/UNV

Also operates:

FT55DL, FT50DL, FPC55, L58T8

80W T5 – PENTRON HO lamps

1-lamp QTP1x80T5HO/UNV

Also operates:

FT80DL

Two lamp models can be wired for one lamp operation.

Key System Features

- Universal voltage (120-277V)
- Low Profile (0.87" height for 49142)
- 1.0 Ballast factor
- QUICKSENSE® ballast technology (end-of-lamp-life sensing)
- PROStart programmed rapid start
- UL type CC rated
- Min. Starting Temp:
 - 0°F (-18°C)
 - -20°F (-29°C) for QTP 2x54T5HO Models
- Operates at >42 kHz to reduce potential interference with infrared control systems
- High power factor
- Low harmonic distortion
- Lightweight
- UL, CSA, FCC
- RoHS compliant
- Lead-free solder and manufacturing process



Application Information

SYLVANIA QUICKTRONIC PROStart T5HO ballasts are ideally suited for:

- Commercial & retail
- Hospitality & institutional
- New construction
- Direct lighting
- Indirect lighting
- Surface mount
- Cove lighting

SYLVANIA QUICKTRONIC Professional Series (QTP) PROStart T5HO electronic ballasts operate PENTRON HO, PENTRON HO Circline, and DULUX® L T5 lamps with full lumen output and optimal system performance.

QUICKTRONIC Professional Series (QTP) PROStart T5HO ballasts provides nearly twice the light output (188%) of T8 systems, with the same number of lamps, allowing many new design options. One lamp fixtures can now be used in place of two lamp models.

QUICKTRONIC Professional Series (QTP) PROStart T5HO ballasts contains QUICKSENSE ballast technology, a patented circuitry designed to shut down the system reliably and safely when lamps reach end-of-life.

These ballasts are also RoHS compliant and feature lead-free solder and manufacturing process.

System Information

QUICKTRONIC Professional Series (QTP) PROStart T5HO ballasts operate from 120V through 277V, 50/60 Hz, eliminating “wrong voltage” wiring errors and reducing the number of models in inventory by half.

PROStart ballasts provide optimum starting conditions to provide up to 100,000 switching cycles for use on occupancy sensors and building control systems.

QUICKSENSE ballast technology helps to protect against overheated bases and sockets, as well as cracking of the glass wall, and uses dynamic end-of-lamp-life sensing to avoid false shutdowns caused by some static sensing methods. QUICKSENSE ballast technology will auto reset when the end-of-life lamps are replaced with new ones.



QUICKTRONIC PROStart T5HO Systems are available in one and two lamp models to cover a wide range of applications.

Setting the standard for quality, QUICKTRONIC PROStart T5HO Systems are covered by the QUICK 60+® warranty,

the first and most comprehensive system warranty in the industry.

System Type	Input Power (W)	Initial System Lumens	System Efficacy LPW
F40T12 - E.S. Magnetic Ballast (4-lamp)	172	11,590	67
F34T12 - E.S. Magnetic Ballast (4-lamp)	144	9500	66
F032T8/XP - QT4x32IS (4-lamp)	114	10,800	95
FP54T5HO - QTP2x54T5HO/UNV PSN (2-lamp)	121	10,000	83
F032T8/XP - QT2x32IS (2-lamp)	59	5400	92
FP54T5HO - QTP1x54T5HO/UNV PSN (1-lamp)	62	5000	81

The two lamp unit can be wired for one lamp operation, allowing for an additional 50% reduction in inventory model numbers.

Customers should always consider upgrading to our **High Efficiency Systems** to maximize energy savings.

SPECIFICATION DATA


Catalog #	Date	Type
Project	Prepared by	
Comments		

Universal Voltage (120-277V)




Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp ¹ Type	Rated ¹ Lumens (lm)	No. of Lamps	Ballast ¹ Factor (BF)	System ¹ Lumens	Mean ¹ Lumens	Input ¹ Power (W)	System Efficacy (lm/W)	BEF ²
49121 (49120)*	QTP1x54T5HO/UNV PSN	0.51/0.21	FP54T5HO	5000	1	1.00	5000	4650	62/60	81/83	1.67
49131 (49130)*	QTP2x54T5HO/UNV PSN	1.00/0.43	FP54T5HO FP54T5HO	5000 5000	2 1	1.00 1.00	10,000 5000	9300 4650	121/118 61	83/85 82	0.85 1.64
49142 (49150)*	QTP2x54T5HO/UNV PSN (NL) .87"	1.00/0.43	FP54T5HO	5000	2	1.00	10,000	9300	121/118	83/85	0.85
	QTP1x80T5HO/UNV PSN	0.74/0.32	FP80T5HO FT80T5DL	7000 6000	1 1	1.00 1.00	7000 6000	6510 5580	90 90	78 67	1.11 1.11

¹ T5/T5HO at 35°C lamp ambient temperature.
² Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest wattage value).
 (Item Number)* = Item Number/NAED in parentheses are models with leads/wires. No parenthesis = Ballasts with connectors only/no leads.

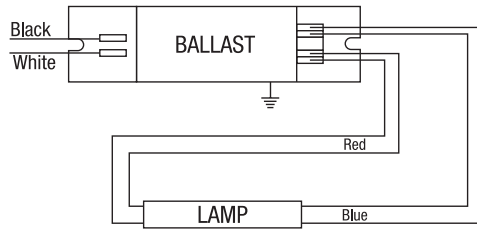

1 LAMP

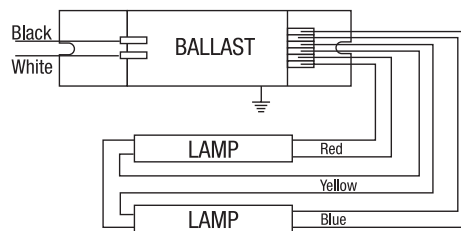

2 LAMP

Dimensions:


Model QTP1x54T5HO/UNV PSN and QTP1x80T5HO/UNV PSN enclosure size:
 Overall: 14.17"L x 1.18"W x 0.87"H (360mm L x 30mm W x 22mm H)
 Mounting: 13.74" (349mm)

Model QTP2x54 T5HO/UNV PSN (49142) enclosure size:
 Overall: 16.73"L x 1.18"W x 0.87"H (425mm L x 30mm W x 22mm H)
 Mounting: 16.34" (415mm)

Model QTP2x54 T5HO/UNV PSN enclosure size:
 Overall: 16.73"L x 1.18"W x 1.00"H (425mm L x 30mm W x 25.4mm H)
 Mounting: 16.34" (415mm)

Wiring:
 Push-in connectors
 Use 18AWG solid copper wire only

Product Weight:
 1L: 0.68 lb each (approx.)
 2L: 0.88 lb each (approx.)

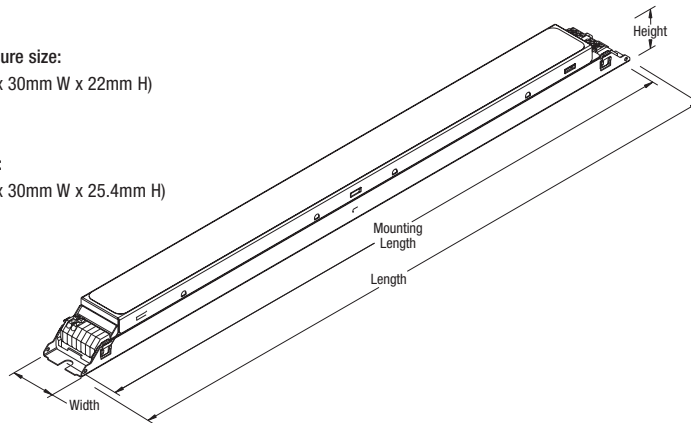

Normal Ballast Factor

T5 PROStart®

Professional Series

Performance Guide

Data based upon SYLVANIA PENTRON® lamps shown. QUICKTRONIC® PROStart T5HO Systems are compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

Specifications⁴

- Starting Method: Programmed Rapid Start
- Ballast Factor: 1.00
- Circuit Type: Series
- Lamp Frequency: >42 kHz
- Lamp CCF: Less than 1.6
- Starting Temp: 0°F (-18°C) minimum⁵
 -20°F (-29°C) Starting for QTP2x54T5HO Models
- Input Frequency: 50/60 Hz
- Low THD: <10%
- Power Factor: >98%
- Voltage Range: ±10% of 120-277V rated line (108-305V)

- UL Listed Class P, Type 1, Outdoor, Type CC³
- CSA Certified
- 70°C Max Case Temperature
- FCC 47CFR Part 18 Non-Consumer Class A Sound Rating
- RoHS Compliant⁶
- ANSI C62.41 Cat. A Transient Protection
- Dynamic End-of-Lamp-Life Sensing
- Remote Mounting (Max. wire length from ballast case to lampholder): up to 18 feet
- 3 UL Type CC compliant ballasts utilize a micro-controller based circuit to reduce arcing caused by loose connections or improper lamp pin to socket connections.
- 4 Data based on PENTRON HO lamp types for primary ballast application. See QUICKSYSTEMS in the SYLVANIA Ballast Technology & Specification Guide for Pentron Circline, DULUX® L/F and other combinations.
- 5 Operation below 50°F (10°C) may affect light output or lamp operation – see "Low Temp. Starting" definition. Remote red leads up to 18 feet. Keep blue leads <10 feet.
- 6 Complies with European Union Restriction of Hazardous Substances Directive (Directive EC 2002/95)

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA National Customer Service and Sales Center
 1-800-LIGHTBULB
 (1-800-544-4828)
 www.sylvania.com

Specifications subject to change without notice.

QTP T5HO PSN

©2013 OSRAM SYLVANIA

Item Number ————— **49131 QTP 2 x 54 T5HO/UNV PSN** ————— Starting/Ballast Factor
 QUICKTRONIC PROFESSIONAL ————— Line Voltage (120-277V)
 Number of Lamps (1, 2) ————— Primary Lamp Wattage