

QUICKTRONIC® Instant Start DL40 Universal Voltage

High Efficiency Series

<10% THD Electronic TT5
Fluorescent Ballast Systems

QHE DL40/28WSS ISN

Lamp / Ballast Guide

40W T5 - DULUX® L

1 lamp QHE 1x40DL/UNV ISN-SC

2 lamp QHE 2x40DL/UNV ISN-SC

3-lamp QHE 3x40DL/UNV ISN-SC

Primary Lamp Type:

FT40DL

Also operates:

FT40DL/28W/SS

Key System Features

- **High Efficiency Systems** over 90% efficient
- Universal voltage (120-277V)
- QUICKSENSE® ballast technology (end-of-lamp-life sensing)
- Min. Starting Temp:
 - 0°F (-18°C) for FT40DL and FT40DL/SS
- High luminous efficacy
- Virtually eliminates lamp flicker
- Quiet operation
- High power factor
- Low harmonic distortion
- Lightweight
- UL, CSA
- Auto Reset

Application Information

SYLVANIA QUICKTRONIC DL40

is ideally suited for:

- Commercial
- Retail
- Hospitality
- Institutional
- Schools
- New construction
- Direct lighting
- Indirect lighting
- Surface mount
- Cove lighting

SYLVANIA QUICKTRONIC High Efficiency (QHE) energy-saving electronic DULUX L 40W ballasts save up to 6 to 9% over standard electronic ballasts without compromising light output or lamp life. The added energy savings also provides for a quicker payback.

SYSTEM DL40 is available in a one lamp, two lamp and a three lamp model. All are Universal Voltage (120-277V) models.

SYSTEM DL40 provides over 30% more lumen output than 34T12 systems at nearly the same power input. Also, the small lamp diameter and sleek profile provide new design options and improved fixture optics.

SYSTEM DL40 ballasts contain QUICK-SENSE ballast technology, a patented circuitry designed to shut down the system reliably and safely when the lamps have reached their end-of-life.

System Information

SYSTEM DL40 uses instant start operation to provide the highest system efficacy and to assure low temperature starting capability. Instant start also provides for maximum remote wiring distances.

QUICKSENSE ballast technology helps to protect against overheated bases and sockets, as well as cracking of the glass wall, and uses dynamic end-of-lamp-life sensing to avoid false shutdowns caused by some static sensing methods. QUICK-SENSE ballast technology will auto reset when the lamps are replaced with new ones.

A complete OSRAM SYLVANIA System Performance Guide showing performance characteristics for all combinations of lamps and ballasts is available upon request.

SYLVANIA QUICKTRONIC High Efficiency (QHE) ballasts operate on input voltage from 120V through 277V, eliminating "wrong voltage" wiring errors and reducing the number of models in inventory by half.



Setting the standard for quality, SYSTEM DL40 is also covered by our QUICK 60+® warranty, the first and most comprehensive system warranty in the industry.

System Type (2 x 2) 2-Lamps	Input Power (W)	Initial System Lumens	System Efficacy LPW
FB40T12 - Std. Magnetic Ballast	96	5795	60
E.S. Magnetic Ballast	86	5795	67
FB34T12 - E.S. Magnetic Ballast	72	4575	66
FB032T8 - Magnetic	71	5415	76
DL40 - QHE2x40DL/UNV ISN-SC	68/67	5670	83/84
DL40/28W/SS - QHE2x40DL/UNV ISN-SC	64/63	5990	94/95
System Type (2 x 2) 3-Lamps	Input Power (W)	Initial System Lumens	System Efficacy LPW
DL40 - Std. Electronic ISN Ballast (0.96 BF)	110	9070	82
DL40 - QHE3x40DL/UNV ISN-SC	100/99	8505	85/86
DL40/28W/SS - QHE3x40DL/UNV ISN-SC	95/94	8990	95/96

SAME LIGHT, LESS POWER

Saves 14% ... 15W with the new 3-Lamp QHE DL40/28W/IS SUPERSAVER System!



SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		




High Efficiency Universal Voltage (120-277V)

Item Number	Description	Input Current (AMPS)	Lamp ¹ Type	Rated Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens	Mean System Lumens	Input Wattage (W)	System Efficacy (lm/W)	BEF ²
49428	QHE 1x40DL/UNV ISN-SC	0.30/0.13	FT40T5	3150	1	0.90	2835	2440	35	81	2.57
		0.27/0.12	FT40DL/28W/SS	2800	1	1.07	2995	2575	32	94	3.34
49429	QHE 2x40DL/UNV ISN-SC	0.56/0.26	FT40T5	3150	2	0.90	5670	4875	68/67	83/84	1.34
49416	Pallet Pack	0.54/0.24	FT40DL/28W/SS	2800	2	1.07	5990	5150	64/63	94/95	1.70
49430	QHE 3x40DL/UNV ISN-SC	0.84/0.36	FT40T5	3150	3	0.90	8505	7315	100/99	85/86	0.91
49417	Pallet Pack	0.79/0.35	FT40DL/28W/SS	2800	3	1.07	8990	7730	95/94	95/96	1.14

Pallet Pack contains 500 pieces, (add "-PAL" to Description).

1: Ballast factor based upon 225mA nominal lamp current for FT40DL lamp and 190mA nominal lamp current for FT40DL/28W/SS lamp.

2: Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Wattage (Note: calculation based on lowest input wattage).

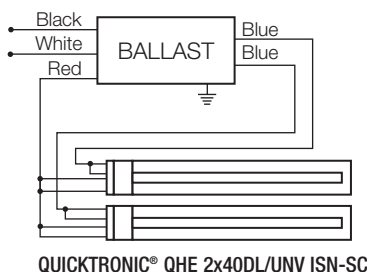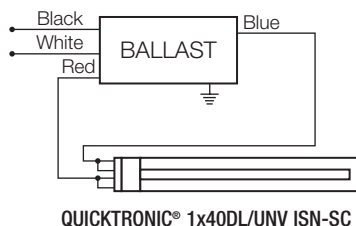

Dimensions:


Overall: 9.5" L x 1.68" W x 1.18" H
Mounting: 8.90"

Packaging:

Quantity: 10 pieces
Pallet Pack: 500 pieces
Weight: 1.6 lbs each (approx)

Wiring:

Leads only (no connectors provided)

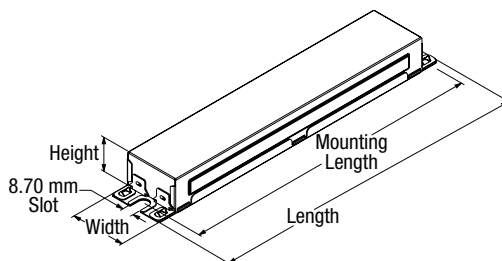

Item Number	49430	QHE 3 x 40DL / UNV ISN SC	Case Size
QUICKTRONIC High Efficiency			Starting/Ballast Factor
Number of Lamps			Line Voltage (120-277V)
			Primary Lamp Wattage

DL40 INSTANT START

High Efficiency

Performance Guide

Data based upon SYLVANIA DL40 lamps shown. QUICKTRONIC® DL40 is also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

Specifications

Data based on FT40T5

Starting Method: Instant Start

Ballast Factor: 0.90

Circuit Type: Parallel

Lamp Frequency: >40kHz

Lamp CCF: Less than 1.7

Starting Temp:³ 0°F (-18°C) for FT40DL
and for FT40DL/SS

Input Frequency: 60 Hz

Low THD: <10%

Power Factor: >98%

Voltage Range: ±10% of 120-277V
rated line (108-305V)

UL Listed Class P, Type 1 Outdoor

CSA Certified

70°C Max Case Temperature

FCC 47CFR Part 18 Non-Consumer

Class A Sound Rating

ANSI C62.41 Cat. A Transient Protection

Remote Mounting (Max. wire length
from ballast case to lampholder):
up to 18 feet

3 Operation below 50°F (10°C) may affect
light output or lamp operation – see
"Low Temp. Starting" definition.

System Life / Warranty

QUICKTRONIC products are covered by our QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to our QUICK 60+ warranty bulletin.

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com

the system solution®