

QUICKTRONIC® PROStart® T8 Parallel Operation Systems

High Efficiency Series

QHE T8 PSN

Lamp / Ballast Guide

Primary Systems

- 32W T8 - OCTRON® lamps
- 1-lamp QHE 1x32T8/UNV PSN-MC
- 2-lamp QHE 2x32T8/UNV PSN-MC
- 3-lamp QHE 3x32T8/UNV PSN-SC
- 4-lamp QHE 4x32T8/UNV PSN-SC

Also operates:

- F030/SS, F028/SS, F025/SS, FB032, FB031, FB030/SS, FB029/SS, F025, F017, FB024 & FB016

F40T8 operation:

- 1 lamp on 2L ballast; 2 lamps on 3L ballast; 3 lamps on 4L ballast

Key System Features

- High Efficiency Systems** over 90% efficient
- NEMA Premium Electronic Ballast Program compliant
- PROStart programmed rapid start
 - Extends lamp life
- Parallel operation** (one lamp out, remaining lamps stay lit)
- Normal ballast factor: 0.88
- UL Type CC
- LSC (Lamp Striation Control)
- Universal input voltage (120-277V)
- Minimum starting temperature:
 - -20°F (-29°C) for T8 lamps
 - 60°F (16°C) for energy saving T8 lamps
- RoHS compliant
- Lead-free solder, printed circuit board and manufacturing process



Application Information

SYLVANIA QUICKTRONIC PROStart T8 ballasts

are ideally suited for:

- Any application where extended lamp life is required to reduce maintenance costs
- Occupancy sensors
- Energy retrofits
- Building control systems

SYLVANIA QUICKTRONIC High Efficiency PROStart programmed rapid start electronic T8 ballast family offers several major advantages:

- High Efficiency:** Operate 32W linear and U-bend equivalent T8 lamps, saving >2 watts as compared to standard T8 programmed rapid start ballasts.
- Parallel Circuitry:** keeps remaining lamps lit if one or more go out.
- Lamp Striation Control (LSC):** T8 energy saving lamps should be operated above 60°F, but under certain conditions, the lamps may striate. LSC circuitry will minimize or eliminate this condition in most applications. (Please consult lamp manufacturers for additional details.)
- Micro-Can Enclosure:** the 1 & 2-lamp models are in the micro-can enclosure. This allows the ballast to fit in very small profile fixtures where standard can T8 ballasts are too large.
- NEMA Premium Electronic Ballast Program and RoHS compliant:** These ballasts feature lead-free solder, printed circuit boards and manufacturing. The NEMA Premium Electronic Ballast Program promotes the use of

System Information

SYLVANIA QUICKTRONIC High Efficiency (QHE) System advantages:

- Operate from 120V through 277V
 - Eliminates "wrong voltage" errors
 - Reduces inventory by 50%
- Utilize Programmed Rapid Start operation for
 - Longer lamp life
 - Over 100,000 switching cycles for occupancy sensor and building control systems
- Operate at >42 kHz to reduce potential interference with infrared control systems



**Type CC, Lamp Striation Control
Parallel Operation
Normal Ballast Factor**




high efficiency T8 electronic ballasts by meeting or exceeding the Ballast Efficiency Factors, (BEF) established by the CEE, (Consortium for Energy Efficiency). For additional details on this program go to: www.cee1.org or www.nema.org

- Longer lamp life:** PROStart technology extends lamp life compared to instant start models for long or short switching cycles, which is ideal for reducing maintenance costs or for saving energy

when using occupancy sensors.

- UL Type CC compliant:** ballasts utilize a micro-controller based circuit to reduce arcing caused by loose connections or improper lamp pin-to-socket connections.
- QUICK 60+® System Warranty:** Setting the standard for quality the system is covered by the first and most comprehensive warranty in the industry.

Lamp & Ballast Type	Input Power (W)	Initial Lumens	Initial LPW	Mean System Lumens	Relative Mean Light Output	% Energy Savings
3-F032/700 QTP3x32T8/UNV ISN-SC	86	6865	80	6310	100%	0%
3-F032/800/XP® QHE3x32T8/UNV PSN-SC	82	7920	97	7445	118%	5%
3-F028/SS QHE3x32T8/UNV PSN-SC	72	7195	100	6760	107%	16%
3-F025/SS QHE3x32T8/UNV PSN-SC	66	6535	99	6140	97%	23%

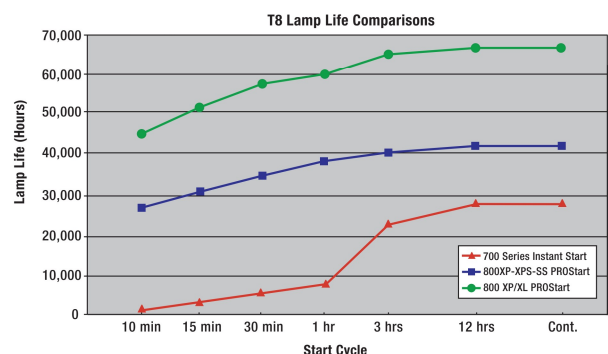

SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		

High Efficiency Parallel Wired, Type CC, Lamp Striation Control (120-277V)



Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp Type	Rated Lumens (lm)	No. of Lamps	Ballast Factor (BF)	Initial System Lumens	Mean System Lumens	Input Power (W) 120V 277V	System Efficacy ¹ (lm/W)	BEF ²
51397 ☼ 51398 ☼	QHE1x32T8/UNV PSN-MC Banded 10-Pack Pallet Pack	0.26/0.11	F032/700	2600	1	0.88	2290	2105	30 29	79	3.03
		0.26/0.11	F032XPS®	3100	1	0.88	2730	2565	30 29	94	3.03
		0.26/0.11	F032XP®/XL	2950	1	0.88	2595	2440	30 29	90	3.03
		0.24/0.10	F030/SS	2850	1	0.88	2510	2360	28 26	97	3.38
		0.22/0.10	F028/SS	2725	1	0.88	2400	2255	26 25	96	3.52
51408 ☼ 51409 ☼	QHE2x32T8/UNV PSN-MC Banded 10-Pack Pallet Pack	0.20/0.09	F025/SS	2475	1	0.88	2180	2045	23 23	95	3.83
		0.48/0.21	F032/700	2600	2	0.88	4575	4205	57 55	83	1.60
		0.48/0.21	F032XPS	3100	2	0.88	5455	5130	57 55	99	1.60
		0.48/0.21	F032XP/XL	2950	2	0.88	5190	4980	57 55	94	3.03
		0.46/0.20	F030/SS	2850	2	0.88	5015	4715	55 53	95	1.66
51413 ☼ 51414 ☼	QHE3x32T8/UNV PSN-SC Banded 10-Pack Pallet Pack	0.43/0.18	F028/SS	2725	2	0.88	4795	4510	51 50	96	1.76
		0.38/0.16	F025/SS	2475	2	0.88	4355	4095	45 44	99	2.00
		0.69/0.29	F032/700	2600	3	0.88	6865	6310	83 82	84	1.07
		0.69/0.29	F032XPS	3100	3	0.88	8185	7695	83 82	100	1.07
		0.69/0.29	F032XP/XL	2950	3	0.88	7790	7320	83 82	95	3.03
51418 ☼ 51419 ☼	QHE4x32T8/UNV PSN-SC Banded 10-Pack Pallet Pack	0.68/0.28	F030/SS	2850	3	0.88	7525	7075	80 78	96	1.13
		0.62/0.27	F028/SS	2725	3	0.88	7195	6760	73 72	100	1.22
		0.56/0.24	F025/SS	2475	3	0.88	6535	6140	67 66	99	1.33
		0.93/0.39	F032/700	2600	4	0.88	9150	8415	111 108	85	0.81
		0.93/0.39	F032XPS	3100	4	0.88	10,910	10,255	111 108	101	0.81
		0.93/0.39	F032XP/XL	2950	4	0.88	10,385	9760	111 108	94	3.03
		0.89/0.38	F030/SS	2850	4	0.88	10,030	9430	105 103	97	0.85
		0.83/0.35	F028/SS	2725	4	0.88	9590	9015	98 95	101	0.93
		0.77/0.33	F025/SS	2475	4	0.88	8710	8190	91 89	98	0.99


Banded Pack contains 10 pieces each, (add "-B" to description). Pallet Pack contains 840 pieces, (add "-PAL" to description).

1 System Efficacy is based on the lowest Input Power


2 BEF (Ballast Efficiency Factor) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest input power)

☼ Preliminary specifications. Please contact OSRAM SYLVANIA for additional information.

1 lamp

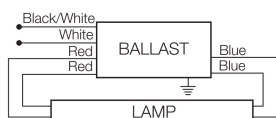


2 lamp

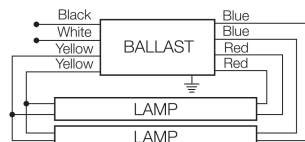

Note: For 1L application, individually cap both RED leads.
Insulate to 600 volts.


4 lamp

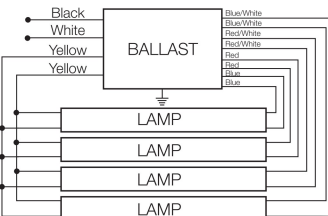

Note: For 3L application, individually cap both RED leads.
For 2L application, individually cap both RED and BLUE leads.
For 1L application, individually cap both RED, BLUE and Red/White leads.
For lamps approved for 1L operation, see QUICKSYSTEMS.
Insulate to 600 volts.


Installation Notes Lamp wiring for 3 & 4 lamp QHE PSX "parallel" models vary from QTP series models. Be sure to wire ballasts per label/schematics shown on this bulletin.

3 lamp

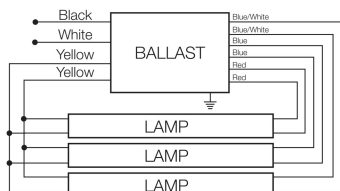

Note: For 2L application, individually cap both RED leads.
For 1L operation, individually cap both RED and BLUE leads.
Insulate to 600 volts.

"SC" Overall: 9.5" L x 1.68" W x 1.18" H
"MC" Overall: 9.5" L x 1.30" W x 1.00" H
Mounting: 8.90"

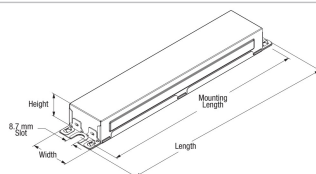

Product Weight:

QHE1xPSN & QHE2xPSN: 0.66 lbs. each
QHE3xPSN & QHE4xPSN: 1.27 lbs. each

Wiring:

Leads only (no connectors provided)

Item Number — 51408 QHE 2 x 32T8 / UNV PSN - MC — Case Size
QUICKTRONIC High Efficiency — Starting/Ballast Factor
Number of Lamps — Line Voltage (120-277V)
Primary Lamp Wattage

Normal Ballast Factor

T8 PROStart®

High Efficiency

Performance Guide

Data based upon SYLVANIA OCTRON® lamps shown. QUICKTRONIC® QHE PROStart ballasts are also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

QHE PROStart ballasts will operate F32 (and the SUPERSAVER® & U-Bend equivalent) T8 lamps. Complete performance data is available in the QUICKSYSTEMS section of the SYLVANIA Ballast Technology & Specification Guide.

Specifications

Data based on F32T8

Starting Method: Programmed Rapid Start

Ballast Factor: 0.88

Circuit Type: Parallel

Lamp Frequency: >42 KHz

Lamp CCF: Less than 1.7

Starting Temp:³

-20°F (-29°C) for OCTRON T8 lamps;

60°F (16°C) for SUPERSAVER® T8 lamps

Input Frequency: 50/60 Hz

Low THD: <10%

Power Factor: >98%

Voltage Range: ±10% of 120-277V rated line (108-305V)

UL Listed Class P, Type 1 Outdoor

UL Type CC Rated

Lamp Striation Control (LSC)

CSA Certified (where applicable)

70°C Max. Case Temperature

FCC 47 CFR Part 18 Non-Consumer

Class A Sound Rating

NEMA Premium Electronic Ballast

Program compliant

RoHS compliant⁴

ANSI C62.41 Cat. A Transient Protection

GFCI & emergency ballast compatible

Remote Mounting (Max wire length from

ballast case to lampholder):

- 20 ft: full wattage T8s
- 10 ft: energy saving T8s
- 4 ft: 25W energy saving T8s

3 Operation below 50°F (10°C) may affect light output or lamp operation – see "Low Temp. Starting" definition.

4 Complies with European Union Restriction of Hazardous Substances Directive.

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com

Specifications subject to change without notice.

