

# M2012-27CK-5EU-F

#### APPLICATION and PERFORMANCE SPECIFICATION

Description: Standard Size - electronic low frequency square wave ballast for 20W metal halide lamps

• Line Voltage: 120 - 277vac, ±10%, 50/60Hz

· Microprocessor controlled

RoHS Compliant

\*60 Hz data

· Mounting type: Feet - side lead exit

· Resonance Start

· Active power factor correction

· Abnormal operation shutdown circuit: Line

voltage must be reset

Lamp		Volts	Input	Nominal	Power	Ballast	Harmonic	Crest
ANSI Type	#	VOILS	Watts	Line Amps	Factor	Factor	Total	Factor
M156/C156	1	120	24	0.21	> 95%	1.00	< 10%	<1.5
	1	277	24	0.10	> 95%	1.00	< 20%	<1.5

188610 **Ballast Order Code:** 

#### Performance:

- Meets ANSI Standard C82.14-2006
- · Meets ANSI Standard C62.41-1991
- · Meets FCC Part 18C for EMI & RFI (non-consumer)
- · EOL Protection

## Safety:

- · No PCBs
- CUL<sub>US</sub> Listed (Outdoor Type 1)
- · Thermal Protection

#### Application:

· Minimum Starting Temperature: -15°C/+5°F · Maximum Case Temperature: 80°C/ 176°F · Sound Rated: Α · Remote Mounting: 15 feet

Each lamp's lead wires must be run in a separate minimum 1/2" ID conduit from the input • Weight: leads to achive good EMI performance and maximum remote capabilities. Individual, unbundled lead wires must be used for extension wiring using wire types SF-2 or SFF-2  $\,$ or equivalent. Power cords and MC cables are not acceptable extension wiring methods. • Lead stripping:(Tinned) All


### **Physical Parameters**

Inches/Metric · Overall Length: 5.51"/140.0mm • Width: 3.62"/92.0mm · Height: 1.57"/39.9mm

20 oz · Lead lengths: 10"/254mm .375"/9.53mm

#### Warranty:

Universal Lighting Technologies warrants to the purchaser that each electronic ballast will be free from defects in material or workmanship for a period of 3 years from date of manufacture when properly installed and under normal conditions of use. The normal operation of 4000 hr./yr. is used for the warranty period. Longer operating times will adjust the warranty period accordingly. For extended warranty periods greater than 36 months, call 1-800 BALLAST for fixture testing instructions.

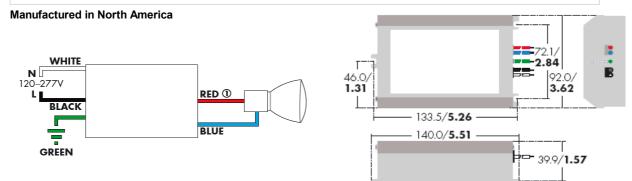

Reprinted by BulbsDepot.com