

## M3912-27CK-5EU-F

### APPLICATION and PERFORMANCE SPECIFICATION

**Description:** Standard Case - electronic low frequency square wave ballast for 39W metal halide lamps

- Line Voltage: 120 - 277vac ,  $\pm 10\%$ , 50/60Hz
- Microprocessor controlled
- RoHS Compliant
- Mounting Type: Feet - side lead exit
- Resonance Start
- Active power factor correction
- Abnormal operation shutdown circuit: Line voltage must be reset

\*60 Hz data

Lamp		Volts	Input Watts	Nominal Line Amps	Power Factor	Harmonic Total	Crest Factor
ANSI Type	#						
<b>M130/C130</b>	<b>1</b>	<b>120</b>	<b>44</b>	<b>0.37</b>	<b>&gt; 95%</b>	<b>&lt; 7%</b>	<b>&lt;1.5</b>
		<b>277</b>	<b>44</b>	<b>0.17</b>	<b>&gt; 95%</b>	<b>&lt; 11%</b>	<b>&lt;1.5</b>

**Ballast Order Code:** 188157

#### Performance:

- Meets ANSI Standard C82.14-2006
- Meets ANSI Standard C62.41-1991
- Meets FCC Part 18C for EMI & RFI (non-consumer)
- EOL Protection

#### Safety:

- No PCBs
- cUL<sub>US</sub> Listed (Outdoor Type 1)
- Thermal Protection

#### Application:

- Minimum Starting Temperature: -15°C/+5°F
- Maximum Case Temperature: 80°C/ 176°F
- Sound Rated: A
- Remote Mounting: 15 feet

Each lamp's lead wires must be run in a separate minimum 1/2" ID conduit from the input leads to achieve good EMI performance and maximum remote capabilities. Individual, unbundled lead wires must be used for extension wiring using wire types SF-2 or SFF-2 or equivalent. Power cords and MC cables are not acceptable extension wiring methods.


#### Physical Parameters

- |                               | Inches/Metric |
|-------------------------------|---------------|
| • Overall Length:             | 5.51"/140mm   |
| • Width:                      | 3.62"/92mm    |
| • Height:                     | 1.57"/39.9mm  |
| • Weight:                     | 20 oz         |
| • Lead lengths: All           | 10"/254mm     |
| • Lead stripping:(Tinned) All | .375"/9.53mm  |

#### Warranty:

Universal Lighting Technologies warrants to the purchaser that each electronic ballast will be free from defects in material or workmanship for a period of 3 years from date of manufacture when properly installed and under normal conditions of use. The normal operation of 4000 hr./yr. is used for the warranty period. Longer operating times will adjust the warranty period accordingly. For extended warranty periods greater than 36 months, call 1-800 BALLAST for fixture testing instructions.

#### Manufactured in North America

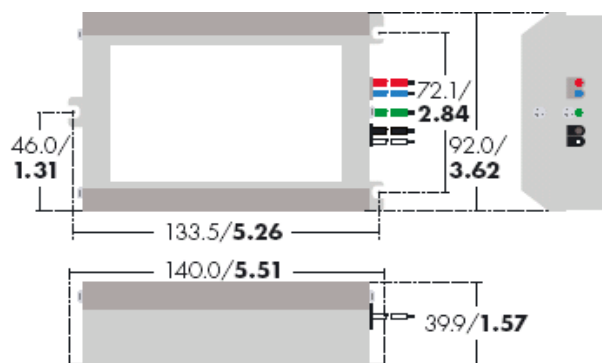

Reprinted by BulbsDepot.com