


# ULP-2G

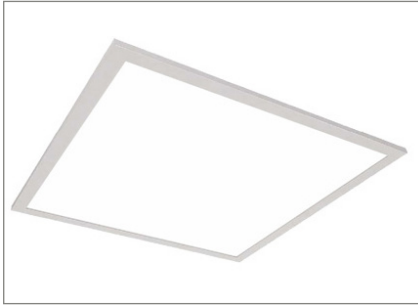

### APPLICATION

The ULP-2G, a field adjustable wattage and color temperature LED panel, provides a single pleasant volumetric soft light giving a larger and brighter ambiance. The LED panel series is designed to lay in drop ceilings in office, schools, and healthcare applications.

### FEATURES:

- The external driver ensures steady performance and long lifetime.
- Without any hazardous material in fixture.
- Aluminum with white powder coated finish.
- Impact resistant frosted lens.
- Field adjustable wattage and color temperature.

### LED:

- Lumen efficiency  $\geq 110$  lm/W
- Field adjustable color temperature: 3500/4000/5000(K)
- Field adjustable wattage.
- CRI:  $>80$
- L70 $\geq 100,000$  hours

### ELECTRICAL:

- 0-10V dimming, down to 10%
- 120-277V, 50/60Hz
- Operating temperature: -4°F to 113°F (-20°C to 45°C)
- <ELCU-200>
- Guarantees emergency lighting remains ON or is turned on when power to the control device is lost.
- Interfaces with fire alarm panel or security system.
- "Watchdog" feature allows emergency loads to be controlled in tandem with normal power loads.
- UL listed for use in emergency circuits.

### LISTING:


- UL 1598 suitable for damp locations, type IC.
- UL 8750 LED equipment in Lighting Products.
- DLC listed.
- 5 years limited warranty.

### CONFIGURATIONS


Size	LED Watts	Lumen Output (3500/4000/5000K)	Lumen Efficiency (3500/4000/5000K)
1' x 4' 2' x 2'	L40	4400lm/ 4440lm/ 4480lm	110/ 111/ 112 lm/W
	L30	3390lm/ 3420lm/ 3450lm	113/ 114/ 115 lm/W
	L25	2900lm / 2925lm/ 2950lm	116/ 117/ 118 lm/W
2' x 4'	L50	5500lm/ 5550lm/ 5600lm	110/ 111/ 112 lm/W
	L40	4520lm/ 4560lm/ 4600lm	113/ 114/ 115 lm/W
	L30	3480lm/ 3510lm/ 3540lm	116/ 117/ 118 lm/W

\* Indication that the lumen output is nominal.

<Standard>

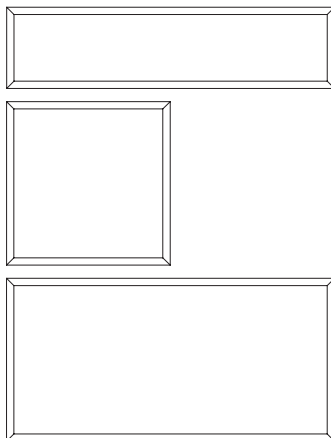

<w/ Surface Mounting Kit>

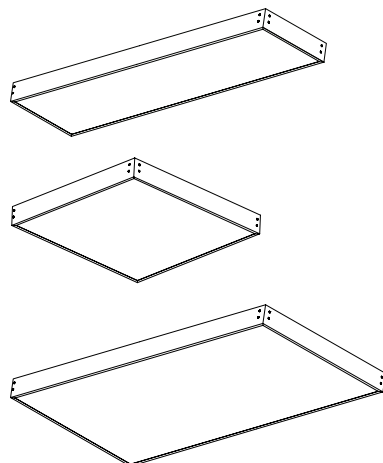

#### Specifications: ULP 1'x4'

Length: 47-3/4 (1213)  
Width: 11-7/8 (301)  
Depth: 1-5/8 (41)  
Weight: 4.4 (2.01)

#### ULP 1'x4' (SMK)

Length: 47-15/16 (1217)  
Width: 11-31/32 (304)  
Depth: 2-13/16 (72)

#### Specifications: ULP 2'x2'

Length: 23-3/4 (603)  
Width: 23-3/4 (603)  
Depth: 1-5/8 (41)  
Weight: 5.7 (2.62)

#### ULP 2'x2' (SMK)

Length: 23-7/8 (607)  
Width: 23-7/8 (607)  
Depth: 2-13/16 (72)

#### Specifications: ULP 2'x4'

Length: 47-3/4 (1213)  
Width: 23-3/4 (603)  
Depth: 1-5/8 (41)  
Weight: 9.21 (4.18)

#### ULP 2'x4' (SMK)

Length: 47-15/16 (1217)  
Width: 23-7/8 (607)  
Depth: 2-13/16 (72)


All dimensions are in inches (millimeters).

# ULP-2G

ORDERING INFORMATION


EXAMPLE: ULP-2G-22-L40/30/25-35/40/50K-UNV-DM

MODEL	SIZE	LED	COLOR TEMP.	MOUNTING	VOLTAGE	
ULP-2G	14 22	1' x 4' 2' x 2'	L40/30/25 25W /30W /40W LED	-35/40/50K Selectable 35/40/50K	(Blank) FK SMK AC66 Recessed T-bar Flange Kit for Hard Ceiling <sup>1</sup> Surface Mounting Kit <sup>1</sup> 66" Aircraft Cable <sup>3</sup>	UNV 120-277V
	24	2' x 4'	L50/40/30 30W /40W /50W LED			

LED DRIVER	PRESET	OPTIONS	LIGHTING CONTROL SYSTEM
DM 0-10V 10%~100% (Std.)	(Blank) PS Non-Preset Preset Request  *Factory default setting: 14-L40-40K 22-L30-40K 24-L50-40K	EMI8 EMI16 ILB-CP10-HE-SD-A  ELCU-200 GTD GTD10DIM  ARRA AMB 8W EM Battery Backup 16W EM Battery Backup IOTA 10W SELF DIAGNOSTIC EM Battery Backup, CEC Compliant Fail-to-on Emergency lighting, UL924 <sup>2</sup> Bodine Generator Transfer Device Bodine Generator Transfer Device (0-10VDC Dimmer Override) Assembled in USA for Buy American Act Anti-Microbial Coating (Matte Skye White)	LUTRON VIVE  <a href="#">&lt;Lutron Vive System Enabled&gt;</a>  <a href="#">Click Here!</a>

NOTES:

1. Supplied in separate boxes, field installed.
2. Shipped separately.
3. The whole cable length from ceiling to fixture is 66".

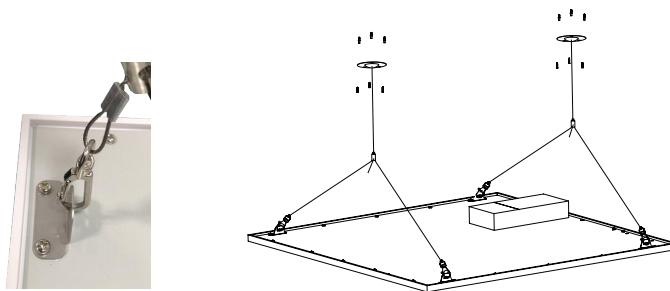

Pendant Mounting

COMPATIBLE DIMMER SWITCH (TABLE 1)

Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Lutron>	Maestro MS-Z101, Nova NTSTV, Diva DVSTV
		<Philips>	Sunrise SR1200ZTUNV