



MH 175W/C/U/MED

GENERAL Characteristics

Lamp Type	Standard MH Single Ended
ANSI Code	M57/E
Bulb Shape	ED17
Base Type	Medium (E26)
Bulb Finish	Coated
Rated Life (V)	10000 hours
Rated Life (H)	7500 hours
Operating Position	Universal

PHOTOMETRIC

Initial Lumens / LPW (V)	13300 / 76
Initial Lumens / LPW (H)	12000 / 69
Lamp Lumen Depreciation (LLD)	0.65 (65%) @ 4000 hours
Correlated Color Temperature	3700K
Chromaticity Coordinates (CIE-x,y)	.395 .390
Color Rendering Index (CRI) R_a	70

PHYSICAL

Bulb Diameter	2.1" (54mm)
Max. Overall Length (MOL)	5.4" (138mm)
Light Center Length (LCL)	3.4" (86mm)
Effective Arc Length	N/A
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	450
Socket Pulse Rating (KV)	-
Luminaire Type	Enclosed Rated

ELECTRICAL


Lamp Watts	175
Lamp Oper. Voltage (Nom.)	132

SUSTAINABILITY

Mercury Amount (mg)	22.6
Picograms of Hg per Mean Lumen Hour (V)	263


NOTES

- Lamp performance ratings published in this data sheet are based upon operation with magnetic ballasts.
- Performance ratings of Universal lamps are based upon Vertical ($\pm 15^\circ$) operation.
- Dimming applicable only when lamp is installed in the Base Up $\pm 15^\circ$ (BU $\pm 15^\circ$) position.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).




Universal
Any Position

ED17




Dia. = 2.1" (54mm)
MOL = 5.4" (138mm)
LCL = 3.4" (86mm)
Base = Medium (E26)


Spectral Distribution

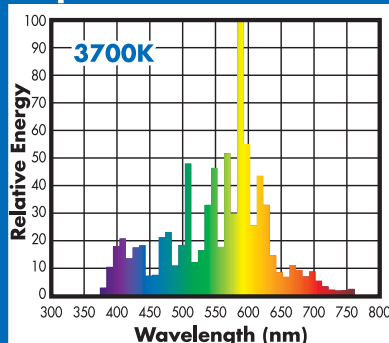

Lumen Maintenance

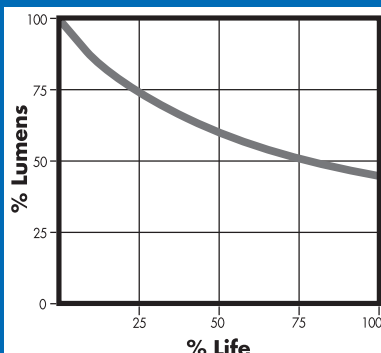

Lamp Mortality

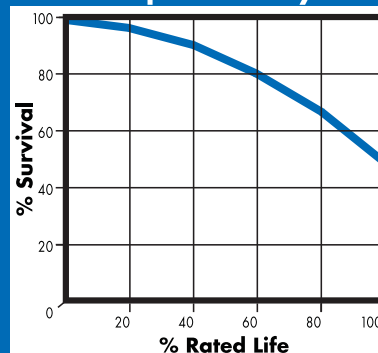

(800) 451-2606

7905 Cochran Road, Suite 300

Glenwillow, Ohio 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.