Fixture Type:

Catalog Number:

Project:

Location:

WAC LIGHTING

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
❍ PD-19403R 8" - 3 Lights	2700K/3000K/3500K/4000K - 90	63 W	2897	❍ BK Black

Example: **PD-19403R-BK**
For custom requests please contact customs@waclighting.com



DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light tomodern spaces.

FEATURES

• Low profile, adjustable powered aircraft cables for an ultra-clean look
• Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
• Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with silicon diffuser

FINISHES:



Black

LINE DRAWING:

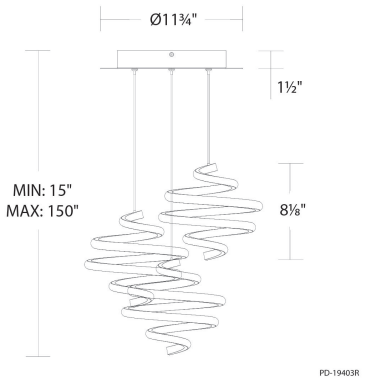

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. December 2024

Fixture Type:

Catalog Number:

Project:

Location:


WAC LIGHTING

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
❍ PD-19405R 8" - 5 Lights	2700K/3000K/3500K/4000K - 90	101 W	4621	❍ BK Black

Example: **PD-19405R-BK**
For custom requests please contact customs@waclighting.com

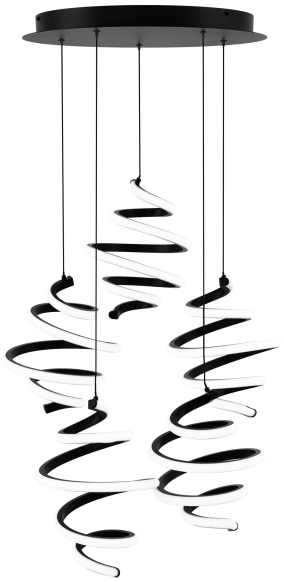

DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light tomodern spaces.

FEATURES

• Low profile, adjustable powered aircraft cables for an ultra-clean look
• Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
• Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with silicon diffuser

FINISHES:



Black

LINE DRAWING:

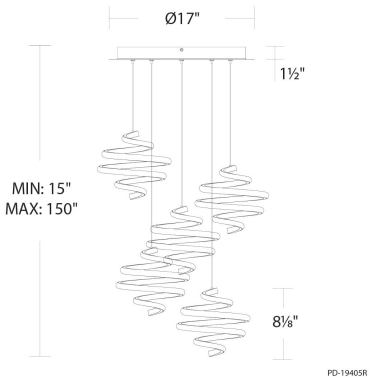

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. December 2024

Fixture Type:

Catalog Number:

Project:

Location:


WAC LIGHTING

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
❍ PD-19409R 8" - 9 Lights	2700K/3000K/3500K/4000K - 90	187 W	8318	❍ BK Black

Example: **PD-19409R-BK**
For custom requests please contact customs@waclighting.com



DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light tomodern spaces.

FEATURES

• Low profile, adjustable powered aircraft cables for an ultra-clean look
• Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
• Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with silicon diffuser

FINISHES:



Black

LINE DRAWING:

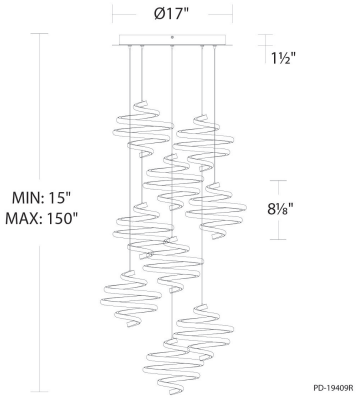

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. December 2024

Fixture Type:

Catalog Number:

Project:

Location:


WAC LIGHTING

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
❍ PD-19415R 8" - 15 Lights	2700K/3000K/3500K/4000K - 90	315 W	13556	❍ BK Black

Example: **PD-19415R-BK**
For custom requests please contact customs@waclighting.com

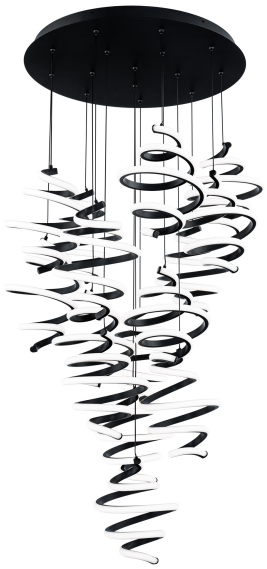

DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light tomodern spaces.

FEATURES

• Low profile, adjustable powered aircraft cables for an ultra-clean look
• Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
• Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with silicon diffuser

FINISHES:



Black

LINE DRAWING:

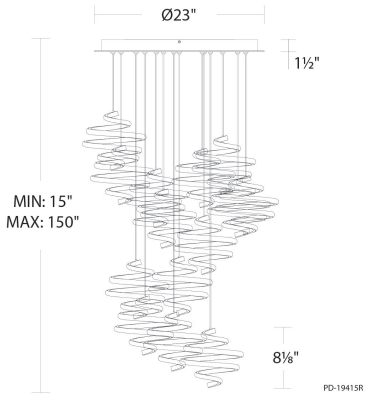

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. December 2024

Fixture Type:

Catalog Number:

Project:

Location:

WAC LIGHTING

Whirl

Round Multi Light 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
❍ PD-19421R 8" - 21 Lights	2700K/3000K/3500K/4000K - 90	439 W	18142	❍ BK Black

Example: **PD-19421R-BK**
For custom requests please contact customs@waclighting.com



DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light tomodern spaces.

FEATURES

• Low profile, adjustable powered aircraft cables for an ultra-clean look
• Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
• Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with silicon diffuser

FINISHES:



Black

LINE DRAWING:

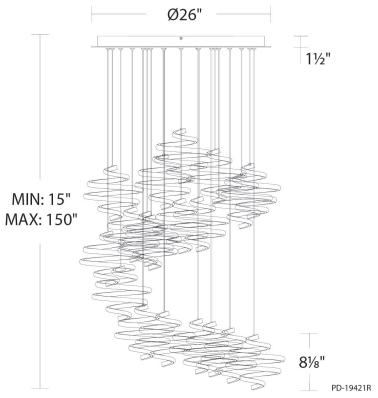

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. December 2024