WAC LIGHTING

Fixture Type:

Catalog Number:

Project:

Location:

Crescent

Pendant 4CCT

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ PD-25410 10"	❍ 2700K	❍ AB Aged Brass	11 W	590	532
	❍ 3000K		11 W	590	532
	❍ 3500K		11 W	590	532
	❍ 4000K		11 W	590	532

Example: **PD-25410-40-AB**

For custom requests please contact customs@waclighting.com



DESCRIPTION

Wax and wane. Like a crescent moon playing hide and seek with the stars and slipping softly through the sky. Clear, ribbed cast glass throws lovely illumination to the room, whilesubtle down light is delivered from this luminaire's solid canopy.

FEATURES

• Three 12" and one 6" downrods included (additional downrods available)
• May be mounted on a sloped ceiling
• Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
• Option to pre-select color temperature or adjust in the field
• 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
• ACLED driverless technology

SPECIFICATIONS


Color Temp:	3500K,3000K,2700K,4000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL
	Damp Location Listed
Construction:	Aluminum body with ribbed acrylic diffuser

FINISHES:



Aged Brass

LINE DRAWING:

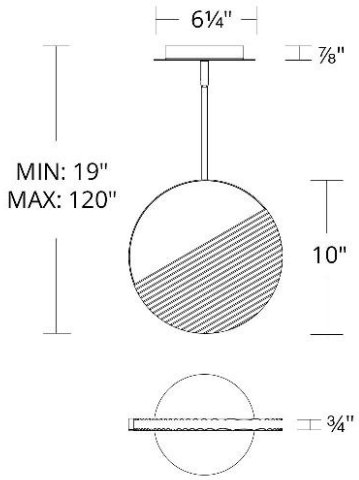

PD-25410-30

REPLACEMENT PARTS

RPL-RODIN12-886-AB - 12" replacement rod for PD-254

RPL-RODIN06-886-A - 6" replacement rod for PD-2541

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. October 2024