

WAC LIGHTING

Parallax

Bathroom Vanity & Sconce

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-73118 18"	2700K/3000K/3500K	BK Black BN Brushed Nickel CH Chrome	6W	271	189

Example: **WS-73118-CH**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Straight forward and honest. Unparalleled

FEATURES


- Foutlight illumination
- Conversion plate included to accommodate 4" junction box
- 3CCT (2700K/3000K/3500K) selectable switch
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL,Title 24 JA8 Compliant,ADA Damp Location Listed
Construction:	Aluminum body, PC diffuser



FINISHES:



LINE DRAWING:

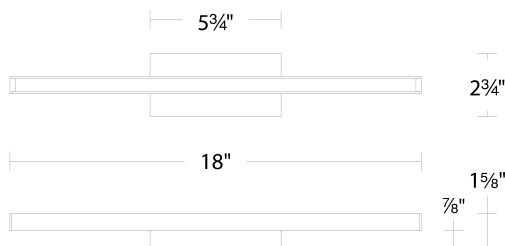

WS-73118

WAC LIGHTING

Parallax

Bathroom Vanity & Sconce

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-73124 24"	2700K/3000K/3500K	BK Black BN Brushed Nickel CH Chrome	6W	393	295

Example: **WS-73124-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Straight forward and honest. Unparalleled

FEATURES


- Foutlight illumination
- Conversion plate included to accommodate 4" junction box
- 3CCT (2700K/3000K/3500K) selectable switch
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL,Title 24 JA8 Compliant,ADA Damp Location Listed
Construction:	Aluminum body, PC diffuser



FINISHES:



LINE DRAWING:

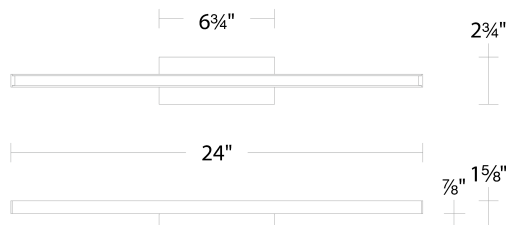

WS-73124