


 JOB NAME: _
 DATE: _
TYPE:

DIMENSIONS:

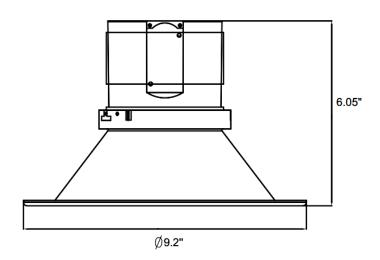

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP	FINISH
CRLC8-15W-30K-D	15W	120~277VAC	1200LM	3000K	HAZE
CRLC8-15W-40K-D	15W	120~277VAC	1245LM	4000K	HAZE
CRLC8-15W-50K-D	15W	120~277VAC	1275LM	5000K	HAZE
CRLC8-15W-30K-D-WH	15W	120~277VAC	1200LM	3000K	WHITE
CRLC8-15W-40K-D-WH	15W	120~277VAC	1245LM	4000K	WHITE
CRLC8-15W-50K-D-WH	15W	120~277VAC	1275LM	5000K	WHITE

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimmable
- Recommended Dimmers: DVTV(LUTRON),IP710(LEVITON)
- Total lumens: 1200~1275LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >80

WARRANTY: 5 years



CRLC8-15W-30K-D CRLC8-15W-30K-D-WH CRLC8-15W-60K-D CRLC8-15W-40K-D-WH CRLC8-15W-50K-D CRLC8-15W-50K-D-WH

8" LED COMMERCIAL RECESSED LIGHT

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

Voltage: 120-277VAC 50/60Hz

Wattage: 15W • Power factor: >0.90 Efficacy: 80~85LM/W

HOUSING SPECIFICATIONS:

- 8" Haze & White Finish TRIM
- · Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: UL
















 JOB NAME:	
 DATE:	
TYPE:	

CRLC8-15W-30K-D CRLC8-15W-30K-D-WH CRLC8-15W-40K-D CRLC8-15W-40K-D-WH CRLC8-15W-50K-D CRLC8-15W-50K-D-WH

8" LED COMMERCIAL RECESSED LIGHT

PHOTOMETRY CHART:

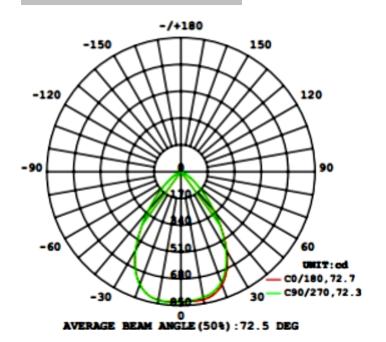

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP	FINISH
CRLC8-15W-30K-D	15W	120~277VAC	1200LM	3000K	HAZE
CRLC8-15W-40K-D	15W	120~277VAC	1245LM	4000K	HAZE
CRLC8-15W-50K-D	15W	120~277VAC	1275LM	5000K	HAZE
CRLC8-15W-30K-D-WH	15W	120~277VAC	1200LM	3000K	WHITE
CRLC8-15W-40K-D-WH	15W	120~277VAC	1245LM	4000K	WHITE
CRLC8-15W-50K-D-WH	15W	120~277VAC	1275LM	5000K	WHITE

TWO WAYS TO ORDER:







COMPLETE UNIT

15W ENGINE

8" TRIM (HAZE & WHITE)

1.ORDER COMPLETE	2.ORDER ENGINE & TRIM SEPARATELY			
UNIT	ENGINE		TRIM	
CRLC8-15W-30K-D	CRLC-ENG-15W-30K-D	+	CRLC-TRM-8	
CRLC8-15W-40K-D	CRLC-ENG-15W-40K-D	+	CRLC-TRM-8	
CRLC8-15W-50K-D	CRLC-ENG-15W-50K-D	+	CRLC-TRM-8	
CRLC8-15W-30K-D-WH	CRLC-ENG-15W-30K-D	+	CRLC-TRM-8-WH	
CRLC8-15W-40K-D-WH	CRLC-ENG-15W-40K-D	+	CRLC-TRM-8-WH	
CRLC8-15W-50K-D-WH	CRLC-ENG-15W-50K-D	+	CRLC-TRM-8-WH	