


FLDX SERIES OUTDOOR LIGHTING

FLDX-LG-10-30W-MCTP-BR
X-GEN BULLET FLOOD LIGHTS



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

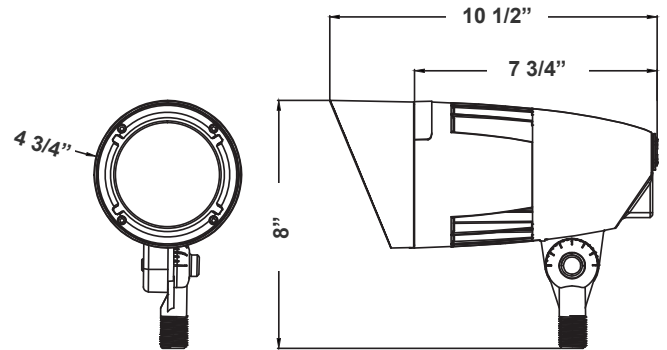

8" (H) x 10 1/2" (W) x 4 3/4" (D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- MCTP: Multi CCP and Power switches on the back of the fixture
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 10W/20W/30W
- Efficacy: 120 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- MCTP: Multi CCP and Power switches on the back of the fixture
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 3600LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Lifespan: 70,000 Hrs.

Applications:




- Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

Other Models:

- 30W | 3600LM | FLDX-LG-10-30W-MCTP-BK



Photometrics: FLDX-LG-10-30W-MCTP-BR

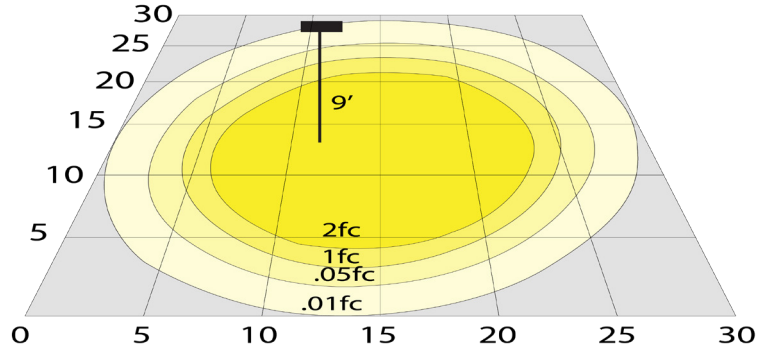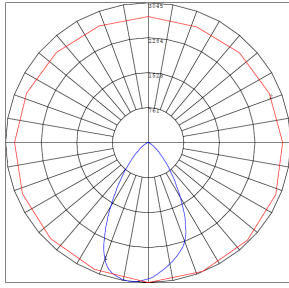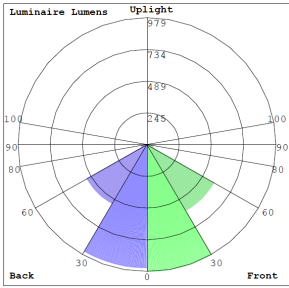

BUG Rating: B2-U0-G0

30W 3000K, Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLDX-LG-10-30W-MCTP-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLDX-LG-10-30W-MCTP-BR	10W 20W 30W	120-277V	3700LM	3000K 4000K 5000K	B2-U0-G0	120

Sample Ordering

Model	Size	Min. Watt	Max. Watt	Color Temp.	Finish
FLDX	LG	10	30W	MCTP	BR

ACCESSORY:

Blank = No Option For Accessories
 FLDVX-FS-LG-BR = X-GEN BULLET REPLACEMENT FLAT SHROUD FOR LG SIZE HOUSING, BRONZE
 FLDVX-LG-RL60 = X-GEN BULLET REPLACEMENT 60-DEGREE REPL. LENS FOR LG SIZE HOUSING

ACCESSORIES:



FLDVX-FS-LG-BR
 X-GEN BULLET REPLACEMENT FLAT SHROUD
 FOR LG SIZE HOUSING, BRONZE

Example:

1. FLDX-LG-10-30W-MCTP-BR (FOR FLDX 30W MCTP FIXTURE 120-277V)
2. FLDX-LG-10-30W-MCTP-BR (FOR FLDX 30W MCTP FIXTURE 120-277V)
 FLDVX-FS-LG-BR (X-GEN BULLET REPLACEMENT FLAT SHROUD FOR LG SIZE HOUSING, BRONZE)



Phone: (877) 805-2252 | Fax: (877) 805-2252
 www.westgatemfg.com

