

GPC SERIES Outdoor Lighting

GPC-60-100W-MCTP
GARDEN POST COACH LIGHT

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

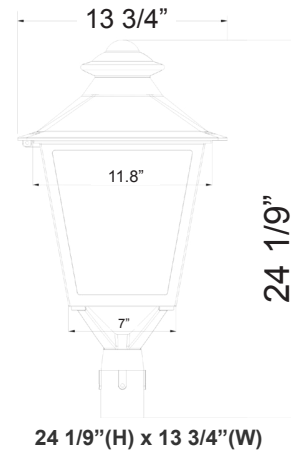

Ideal for Residential Landscaping, Commercial Landscaping, Public Parks and Gardens, Pathway Lighting, Architectural Highlights, Hospitality and Outdoor Dining And Residential Communities.

Features

- Housing: Aluminum
- Finish: Black powder coated
- 70,000 Hours Rated Life
- 7-Year Warranty
- Multi CCT: Selectable CCTs Switch Located Under the Top Hat
- Open Sides & Bottom

Technical Specifications

Electrical:

- Voltage: 120-277V AC/50~60 Hz
- Wattage: 60W/80W/100W Selectable
- Power factor: >0.9
- Efficacy: 90 LPW
- THD: ≤20%

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish
- Open Sides & Bottom
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Dimmable: 0~10V Dimming
- Multi CCT: Selectable CCTs Switch Located Under the Top Hat
- Total Lumens: 5400LM/7200LM/9000LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 70
- 70,000 Hours Rated Life

Applications:

- Ideal for Residential Landscaping, Commercial Landscaping, Public Parks and Gardens, Pathway Lighting, Architectural Highlights, Hospitality and Outdoor Dining And Residential Communities.






Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



WG-06232022

Photometrics: GPC-60-100W-MCTP

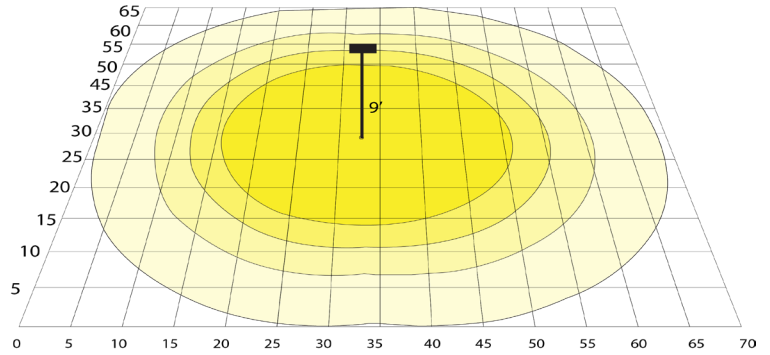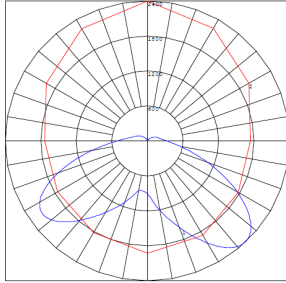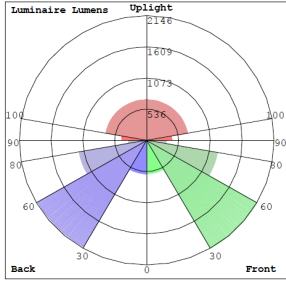

BUD Rating: B3-U4-G3

100W 5000K, Area 65'x 70' Mounting Height: 9'

Other Views:



Lens View
Power & CCT Switches



Bottom View
Inside Diameter: 2-3/4"

Performance Table: GPC-60-100W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GPC-60-100W-MCTP	60W	120V	5400LM	3000K	B3-U4-G3	90
	80W		7200LM	4000K		
	100W		9000LM	5000K		

Sample Ordering

Model Min. Watt Max. Watt Color Temp.

GPC - 60 - 100W - MCTP

Accessories:

- Blank = No Option For Accessories
- GPC-GBF-KIT = ONE-SIDE FROSTED GLASS LENS KIT
- OPT-LF3-PCK = TWIST-LOCK PHOTOCELL ON TOP
- GPC-GSF-KIT = 4-SIDE FROSTED GLASS LENS KIT
- GPC-LENS-GLUE = SILICON GLUE FOR LENS INSTALLATION
- GPC-PCLC = CLEAR PC LENS - NEEDS PRO INSTALLATION
- GPC-PCLF = FROSTED PC LENS - NEEDS PRO INSTALLATION
- GPC-SH = GPC HOUSE-SIDE GLARE SHIELD
- PML-BASE-BK = DECORATIVE PIER MOUNT BASE FOR POST TOP LIGHTS - BLACK

ACCESSORIES:



GPC-PCLF
Shown with Frosted Lens




OPT-LF3-PCK
Twist-Lock PhotoCell on Top



GPC-SH
Shown with Shield



PML-BASE-BK
DECORATIVE PIER MOUNT BASE FOR
POST TOP LIGHTS -BLACK

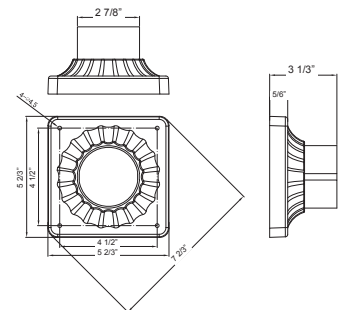

5 2/3"(H) X 5 2/3"(W) X 3 1/3"(D)

