


DIMENSIONS:

11"(W) x 13"(H) x 6.5"(D) x 3.25"(H1) x 9"(L)



LWA-120-WW
LWA-120-NW
LWA-120-CW

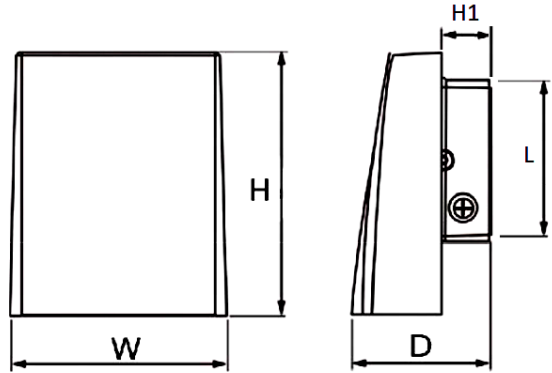

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LWA-120-CW	120W	120~277V AC	13700 LM	5000K
LWA-120-NW	120W	120~277V AC	13700 LM	4000K
LWA-120-WW	120W	120~277V AC	13700 LM	3000K

LED CUTOFF & ADJUSTABLE WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Great for use with motion sensors or other instant on/off controls.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 120W
- Input current: 1.5A Max
- Other wattages: 12W, 20W, 30W, 50W, 80W
- Power factor: >0.95

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- High light transmittance, anti-UV and fire resistant PC lens

CERTIFICATIONS: UL, DLC



OPTIONAL ACCESSORIES:



MODEL	DESCRIPTION
LWA-SH3	shroud (Bronze) for LWA 120W

LIGHTING SPECIFICATIONS:

- Dimmable: 0~10V dimmable
- LED type/brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 13700 LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Beam angle: 80° x 100°

WARRANTY: 5 years

