

RDL SERIES RESIDENTIAL LIGHTING


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

RDL4-BF-MCT5-12V
12V LOW-VOLTAGE LED REPLACEMENT TRIMS FOR MR16 HOUSINGS

MCT5 Multi Color Temperature (Selectable)



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

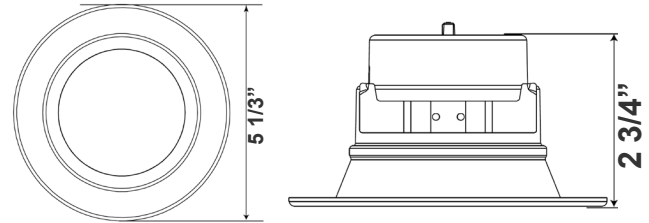

LED DOWNLIGHTS (BAFFLE TRIM) - 4" ROUND Ideal for New as well as old residential and commercial constructions.

5 1/34" x 2 3/4"

Features

- 4" Baffle Trim
- Multi CCT (Selectable Switch On the Back Of The Driver)
- Isolated Driver For Improved Thermal Management
- 5-Year Warranty
- Spun Aluminum With White Powder Coat Finish

Technical Specifications

Electrical:

- Voltage: 12V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 11W
- Total Harmonic Distortion: ≤15 %
- Efficacy: 77 LPW

Mechanical:

- Spun Aluminum With White Powder Coat Finish
- Includes 8" Bi-Pin Adapter That Fits any Standard MR16 lamp Base
- Maximum Ambient Temperature: 104°F
- Fits in Standard 4" Recessed Housings
- Wet Location
- 5-Year Warranty

Lighting:

- Multi CCT (Selectable Switch On The Back of The Driver)
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Can Rotate After Installation to Align
- Optics: White Translucent Acrylic Lens
- Total Lumens: 847LM Max.
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

Applications:

- LED retrofit trim have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

Other Models:



- 11W | 847LM | RDL4-ST-MCT5-12V




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |



Photometrics: RDL4-BF-MCT5-12V




BUG Rating: B1-U1-G0

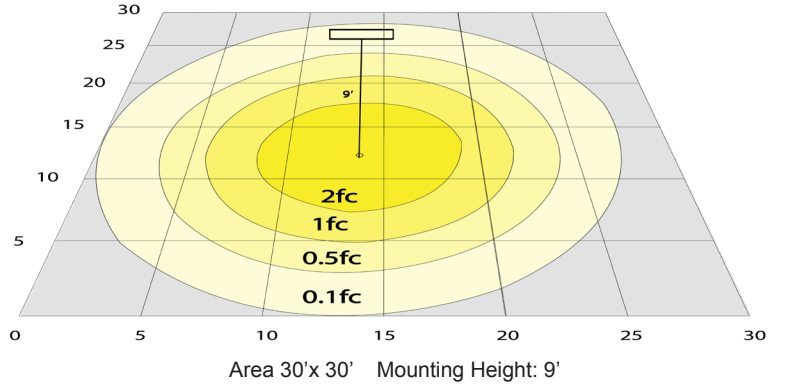


Area 30'x 30' Mounting Height: 9'


Other Views:

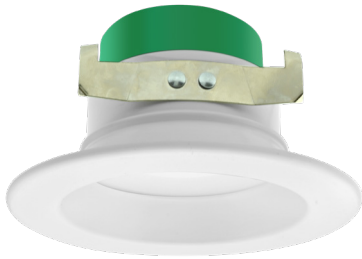

Side View

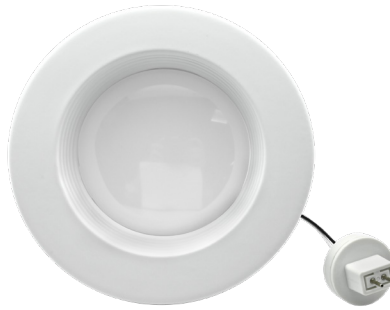

Front View

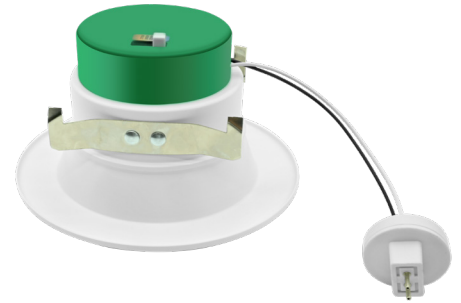

Back View

Performance Table: RDL4-BF-MCT5-12V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RDL4-BF-MCT5-12V	11W	12V	847LM	2700K	B1-U1-G0	77
				3000K		
				3500K		
				4000K		
				5000K		

Sample Ordering

Model	Trim	Color Temp.	Volt
RDL4	BF	MCT5	12V

