

SFX SERIES OUTDOOR LIGHTING



SFX-G7-700-1000W-45D-50K
GENERATION 7 STADIUM LIGHT

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

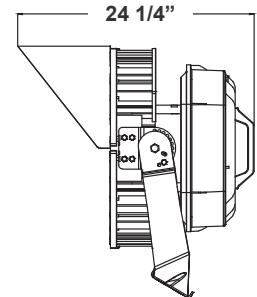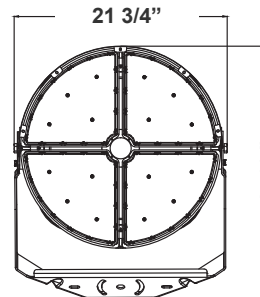

25 3/4"(H) x 21 3/4"(W) x 24 1/4"(D)

Ideal for Stadium lighting, Sports fields, parking lots, docks, railway and container yards, Architectural lighting, Industrial and commercial exterior lighting, trade shows, exhibitions.

Features

- Die-Cast Aluminum Housing with Powder Coat Finish (Black)
- 7-year Warranty
- 20KV Lightning Surge Protection

Technical Specifications

Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 700W/800W/900W/1000W
- Power Factor: >0.90~0.97
- Efficacy: 150LPW

Mechanical:

- Die-Cast Aluminum Housing with Powder Coat Finish (Black)
- Cord type: 3' SJTW 18/3 AWG Cable
- Half Shroud & U Mounting Bracket Included
- Effective Projected Area (EPA): 1.8 (sq. ft.)
- Operating Temperature: -40°F to 176°F
- IP Rating: IP65, Suitable for Wet Locations
- 7-year Warranty

Lighting:

- 20KV Lightning Surge Protection
- Total lumens: 150000LM Max.
- Color Temperatures: 5000K
- Color Rendering Index: CRI ≥ 84
- Rated Life: 70,000 Hrs
- Beam Angle: 45°


Applications:

- Stadium lighting, Sports fields, parking lots, docks, railway and container yards, Architectural lighting, Industrial and commercial exterior lighting, trade shows, exhibitions.


- 500W | 75000LM | SFX-G7-200-500W-45D-50K



Photometrics: SFX-G7-700-1000W-45D-50K

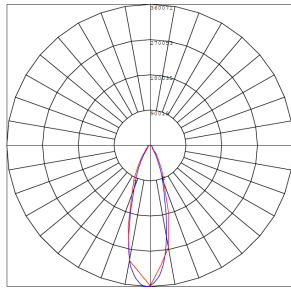


BUG Rating: B5-U0-G4

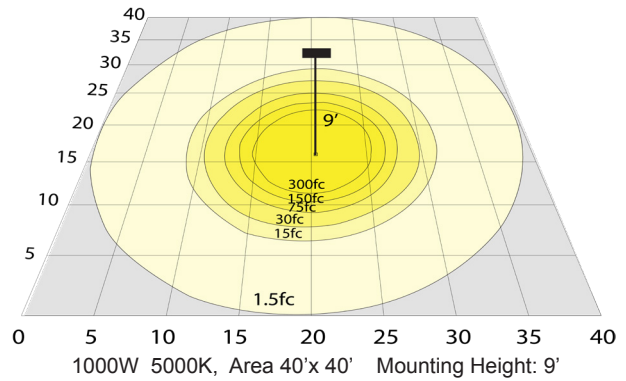

Other Views:



Shown with shroud



Side View



Back View

Performance Table: SFX-G7-700-1000W-45D-50K

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SFX-G7-700-1000W-45D-50K	700W 800W 900W 1000W	120~277V	105000LM 120000LM 135000LM 150000LM	5000K	B5-U0-G4	150

Sample Ordering

Model	Style	Min. Watt	Max. Watt	Beam Angle	Color Temp.
SFX	G7	700	1000W	45D	50K

Accessory:

Blank = No Option For Accessories
SFX-G7-SF = Slip Fitter Adapter

Accessory:




SFX-G7-SF

Other Model: SFX-G7-200-500W-45D-50K



Shown with shroud



Sidew View



Back View

