




DIMENSIONS:

Ø14" (OD) x 5.5" (H)

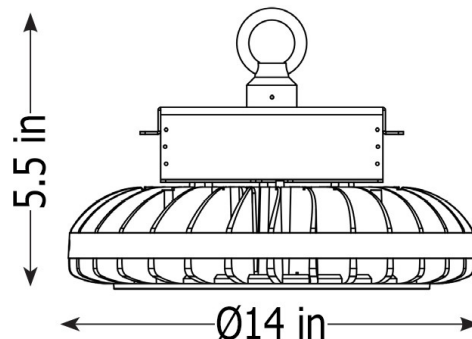

UHB2-220-CW UHB2-220-NW

LED UFO HIGH BAY FIXTURES

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 220W
- Other wattages: 100W, 150W, 300W, 360W
- Power factor: >0.9
- Efficacy: 120LM/W

HOUSING SPECIFICATIONS:

- ACD12 aluminum heat sink, SUS black plate
- Outdoor powder coat finish (Black)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- High-transmittance, anti-UV and fire resistant PC lens

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UHB2-220-CW	220W	120~277V AC	27000 LM	5000K
UHB2-220-NW	220W	120~277V AC	27000 LM	4000K

LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 27000LM
- Color temperature: 4000K / 5000K
- Color rendering index: >80
- Beam angle: 90°

WARRANTY: 5 years



UHB2-220-CW

UHB2-220-NW

LED UFO HIGH BAY FIXTURES


CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UHB2-220-CW	220W	120~277V AC	27000 LM	5000K
UHB2-220-NW	220W	120~277V AC	27000 LM	4000K

PHOTOMETRICS:

Spectral Power Distribution & Chromaticity Diagram

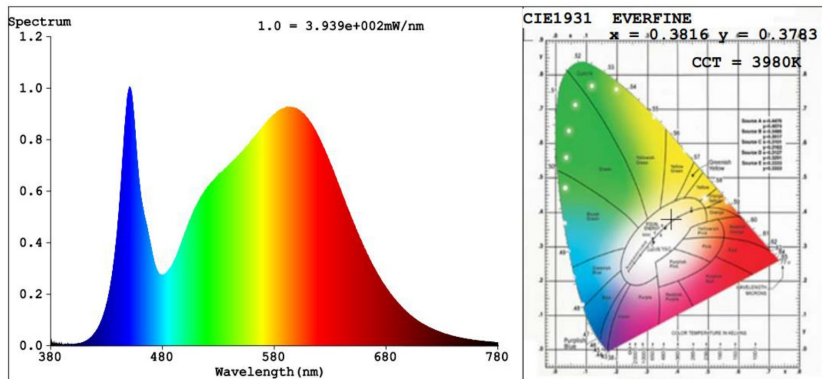

	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	43.2 fc	35.8 ft 35.5 ft
34.0ft	10.8 fc	71.5 ft 70.9 ft
51.0ft	4.8 fc	107.3 ft 106.4 ft
68.0ft	2.7 fc	143.1 ft 141.8 ft
85.0ft	1.7 fc	178.8 ft 177.3 ft
102.0ft	1.2 fc	214.6 ft 212.7 ft

■ Vert. Spread: 92.9°
■ Horiz. Spread: 92.4°

