### XTSL SERIES Exit & Emergency Lighting



7 1/2"

12" (W) x 7 1/2" (H) x 1" (D)

4 2/5"

8"

1"

Type:

**XTSL-GW** 



Exit signs shall be provided at every exit door, at the intersection of corridors, at exit stairways or ramps and such other locations and intervals as are necessary to provide the occupants with knowledge of the various means of egress available

### eatures

- Ultra Thin Exit Sign
- 5-Year Warranty
- Maximum 24 hours for Full Recharge Time

### **Technical Specifications**

#### **Electrical:**

- Voltage: 120-277V / 60Hz
- Input Power: 1.1 W
- AC Charging Current: 20 mA
- Discharge Time: ≥90mins
- Fully Automatic Solid-State, Two Rate Charger Initiates Battery Charging to Recharge a Discharged Battery in 24 hours
- Test Switch and Charge Indicator
- 1.2V long Life, Maintenance-Free, Rechargeable Ni-MH Battery

#### Mechanical:

- White Finish
- Universal Single/Double Faceplate
- Letters 6 Height with 3/4 Stroke.(AVZ-CM15-R) •
- Operating Temperature: -17.78 °F ~ 104 °F
- Injection-Molded Thermoplastic ABS Housing, UL 94V-0 Flame Rating
- Innovative, Easy Installation in Minutes

#### Other Models:

**XTSL-RW** 

- Built-in 1.2V 1000mAh Ni-MH Battery for Minimum 90 **Minutes Emergency Operation**
- Ultra bright GREEN LEDs

Customer Name: Project Name:

 $\langle\!\langle$ 

5 1/2"

12"

Note:

Selection:

#### Lighting:


- Ultra Bright GREEN LEDs
- Color Temperature: 1001K
- Total Lumen: 4.8 LM
- Internal Solid-State Transfer Switch Automatically Connects the Internal Battery to LED Board for Minimum 90-minute Emergency Illumination
- 5-year Warranty

#### **Applications:**

Ideal for every exit door, at the intersection of corridors, at exit stairways or ramps and such other locations





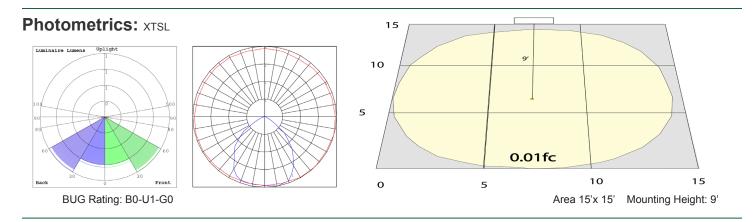

#### **Other Views:**



#### Performance Table: XTSL

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	<b>BUG</b> Rating	LPW
XTSL-GW	1.1W	120~277V	4.8LM	1001K	B0-U1-G0	4

## Sample Ordering

XTSL = GW

#### **Other Models:**



XTSL-RW

XTSL-CL-RW

2

# WESTGATE

