


Description: Programmed Start Electronic Ballast

Lamps Operated:



 FT18W/2G11, F24W/2G11
 CFQ26W/GX24q, CFTR26W/GX24q


 FC9T5, FC12T5,

ELECTRICAL DATA

INPUT VOLT	120~277VAC, >45kHz
LAMP WATTS/TYPE	CFQ26W/GX24q, CFTR26W/GX24q, FC9T5, FC12T5, FT18W/2G11, F24W/2G11
LAMPS OPERATED	1
LINE CURRENT	0.42A @ 120V thru 0.06A @ 277V
POWER FACTOR	0.98
SOUND RATING	"A"
BALLAST TYPE	Programmed Start
PCB	No
PROTECTION	Inherent Thermal Protection, End of Lamp Life Protection
DIMMING	0-10V
DIMMING RANGE	1% - 100%
TC MAX	75°C (167°F)
MIN. OPERATING TEMP	10°C (50°F)
APPROVALS/CLASS	Class P - Type CC
APPLICABLE DIMMERS	Lutron NTFTV, Lutron NFTV-WH, Leviton IP710-DLX
Auto-Restart After Replacement of Defective Lamp	
Automatic Identification of Lamp Type	


MECHANICAL DATA

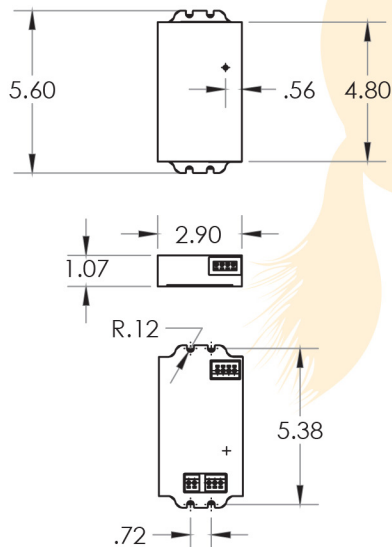


Where : L= Length, W = Width, H = Height

WIRING DIAGRAMS

TOP VIEW

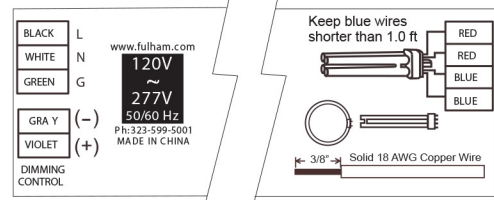

BOTTOM VIEW

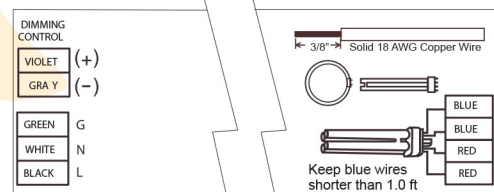

Ballast must be properly grounded.
Operate new lamp for 100 hours at full output prior to the first dimming

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.