



SPECIFICATION SHEET : **WH3-277-L**

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277V APPLICATIONS)

INPUT VOLT: 277V \pm 10%, 50/60Hz								
LAMP WATTS/TYPE	54WT5HO	* F32T8	* F32T8	CFQ26W	CR32W	CFQ26W	CFQ18W	CFQ18W
LAMPS OPERATED	1	1	2	2	1	2	1	2
INPUT WATTS	57	38	62	47	28	47	25	41
LINE CURRENT:	0.22	0.16	0.24	0.19	0.13	0.19	0.11	0.16
POWER FACTOR	0.92	0.88	0.93	0.92	0.81	0.92	0.90	0.92
BALLAST FACTOR	0.92	1.17	1.00	0.87	0.87	0.87	1.17	1.05
EFFICACY FACTOR	1.63	3.04	1.61	1.84	3.09	1.84	4.75	2.59
THD	33%	33%	33%	34%	36%	36%	38%	37%
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI 62.41							
INPUT/PROTECTION	FUSE							
MIN. OPERATING TEMP	-30 $^{\circ}$ C (-20 $^{\circ}$ F)							
MAX. CASE TEMP	70 $^{\circ}$ C (158 $^{\circ}$ F)							
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							
APPROVALS/CLASS	* UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							

MECHANICAL DATA

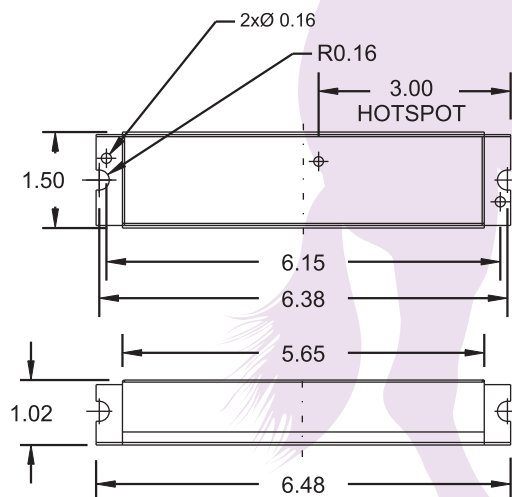

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 \pm 1"	12 \pm 1"	36 \pm 1"	-	36 \pm 1"	-

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM's CATALOG

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.



SPECIFICATION SHEET : **WH3-277-L**

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277V APPLICATIONS)

INPUT VOLT: 277V \pm 10% , 50/60Hz							
LAMP WATTS/TYPE	CFT13W	CFT13W	CFTR18W	CFTR26W	CFTR26W	CFTR32W	CFTR32W
LAMPS OPERATED	1	2	2	1	2	1	2
INPUT WATTS	17	26	24	27	44	32	53
LINE CURRENT:	0.09	0.11	0.11	0.12	0.18	0.14	0.21
POWER FACTOR	0.90	0.90	0.90	0.90	0.90	0.90	0.90
BALLAST FACTOR	0.97	0.88	1.14	0.90	0.80	0.60	0.73
EFFICACY FACTOR	5.78	3.33	4.74	3.30	1.80	1.86	1.38
THD	39%	37%	38%	37%	34%	36%	32%
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)						
SOUND RATING	" A "						
BALLAST TYPE	INSTANT START						
VOLTAGE TRANSIENTS	ANSI 62.41						
INPUT/PROTECTION	FUSE						
MIN. OPERATING TEMP	-30 $^{\circ}$ C (-20 $^{\circ}$ F)						
MAX. CASE TEMP	70 $^{\circ}$ C (158 $^{\circ}$ F)						
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR						
APPROVALS/CLASS	* UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR						

MECHANICAL DATA

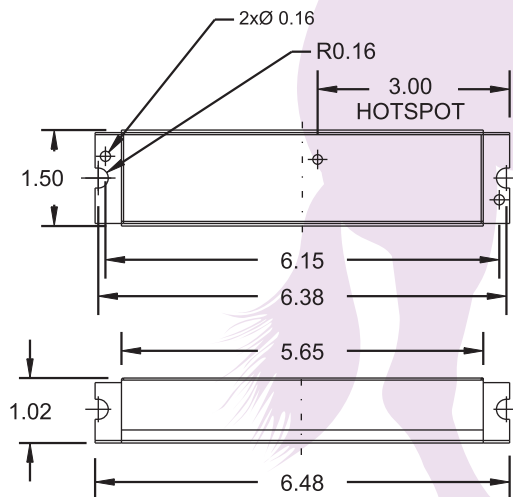

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 \pm 1"	12 \pm 1"	36 \pm 1"	-	36 \pm 1"	-

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM's CATALOG

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.



SPECIFICATION SHEET : **WH3-277-L**

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277V APPLICATIONS)

INPUT VOLT: 277V \pm 10%, 50/60Hz								
LAMP WATTS/TYPE	* CR40WT9	F39T5HO	*F17T8	F24T5HO				
LAMPS OPERATED	1	1	2	2				
INPUT WATTS	37	37	36	41				
LINE CURRENT:	0.16	0.15	0.14	0.16				
POWER FACTOR	0.90	0.86	0.93	0.93				
BALLAST FACTOR	0.94	0.79	1.10	0.80				
EFFICACY FACTOR	2.58	2.16	3.06	1.97				
THD	35%	36%	35%	34%				
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI 62.41							
INPUT/PROTECTION	FUSE							
MIN. OPERATING TEMP	-30 $^{\circ}$ C (-20 $^{\circ}$ F)							
MAX. CASE TEMP	70 $^{\circ}$ C (158 $^{\circ}$ F)							
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							
APPROVALS/CLASS	* UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							

MECHANICAL DATA

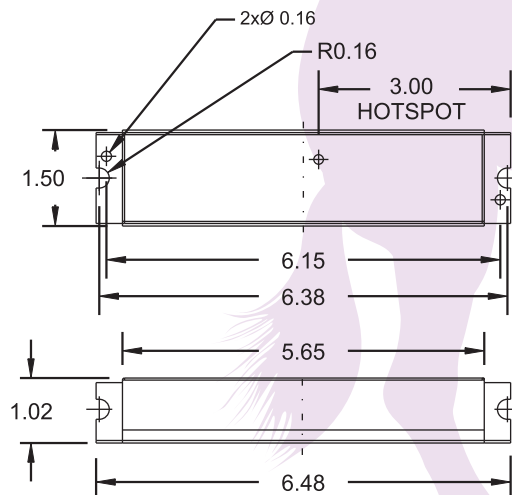

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 \pm 1"	12 \pm 1"	36 \pm 1"	-	36 \pm 1"	-

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM's CATALOG

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.