

# SPECIFICATION SHEET: WH33-120-BLS

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

### **ELECTRICAL DATA**

INPUT VOLT: 120V ± 10%,	50/60Hz									
		E45T0	E47T0						1	
LAMP WATTS/TYPE	F15T8	F15T8	F17T8							
LAMPS OPERATED	2	3	3							
INPUT WATTS	33	42	51							
LINE CURRENT:	0.29	0.37	0.44							
POWER FACTOR	0.94	0.95	0.95							
BALLAST FACTOR	0.98	0.86	0.59							
EFFICACY FACTOR	2.99	2.05	1.15							
THD	31%	29%	28%							
EMI/RFI COMPLIANCE				FCC PART	18-A (Non-C	Consumer)				
SOUND RATING					"A"					
BALLAST TYPE				IN:	STANT STAF	RT				
VOLTAGE TRANSIENTS		ANSI 62.41								
INPUT/PROTECTION		FUSE								
MIN. OPERATING TEMP		-30 °C (-20 °F)								
MAX. CASE TEMP		70 °C ( 158 °F )								
APPROVALS/CLASS			UL/o	CUL LISTED, (	CLASS " P ", 1	OR 2 OUTD	OOR			

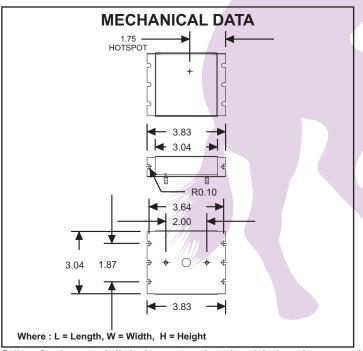

WIRING DIAGRAMS									
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN			
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	12 <u>+</u> 1"	-	12 <u>+</u> 1"	-			

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



# SPECIFICATION SHEET: WH33-120-BLS

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

### **ELECTRICAL DATA**

INPUT VOLT: 120V ± 10%,	50/60Hz									
LAMP WATTS/TYPE	CFT24/27	CFT24/27	CFT40	2D55W	T5CR22W	T5CR22W	T5CR22W	CFQ26W	CFTR32W	
LAMPS OPERATED	1	2	1	1	1	2	3	2	2	
INPUT WATTS	28	47	50	54	30	48	65	50	54	
LINE CURRENT:	0.25	0.41	0.43	0.47	0.27	0.42	0.56	0.44	0.47	
POWER FACTOR	0.95	0.96	0.96	0.96	0.95	0.96	0.96	0.96	0.96	
BALLAST FACTOR	1.00	0.86	1.02	0.88	1.02	0.95	0.87	0.84	0.73	
EFFICACY FACTOR	3.50	1.84	2.04	1.62	3.37	1.98	1.35	1.68	1.36	
THD	32%	29%	28%	28%	38%	29%	27%	29%	28%	
EMI/RFI COMPLIANCE		FCC PART 18-A (Non-Consumer)								
SOUND RATING					"A"					
BALLAST TYPE				IN	STANT STAF	RT				
VOLTAGE TRANSIENTS					ANSI 62.41					
INPUT/PROTECTION					FUSE					
MIN. OPERATING TEMP		$-30^{0}$ C (-20 $^{0}$ F)								
MAX. CASE TEMP		70 °C ( 158 °F )								
APPROVALS/CLASS			Ul	LISTED, CL	ASS " P ", 1 O	R 2 OUTDOO	DR		·	

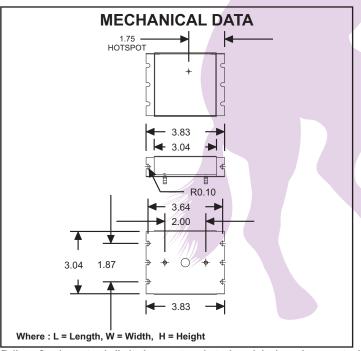

WIRING DIAGRAMS									
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN			
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	12 <u>+</u> 1"	-	12 <u>+</u> 1"	-			

FOR WIRING DIAGRAM, PLEASE REFER TO FULHAM'S CATALOG

NOTE: This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



# SPECIFICATION SHEET: WH33-120-BLS

This Is An Original Product From Fulham Co., Inc


Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

## **ELECTRICAL DATA**

INPUT VOLT: 120V ± 10%	, 50/60Hz									
LAMP WATTS/TYPE	CFTR26W									
LAMPS OPERATED	2									
INPUT WATTS	51									
LINE CURRENT:	0.45									
POWER FACTOR	0.96									
BALLAST FACTOR	0.87									
EFFICACY FACTOR	1.69									
THD	28%									
EMI/RFI COMPLIANCE				FCC PAR	Γ 18-A (Non-C	Consumer)				
SOUND RATING					"A"					
BALLAST TYPE				IN	ISTANT STAF	RT				
VOLTAGE TRANSIENTS					ANSI 62.41					
INPUT/PROTECTION		FUSE								
MIN. OPERATING TEMP		$-30$ $^{\circ}$ C ( $-20$ $^{\circ}$ F)								
MAX. CASE TEMP		70 °C ( 158 °F )								
APPROVALS/CLASS				UL LISTED, CI	ASS " P ", 1 O	R 2 OUTDOO	)R			

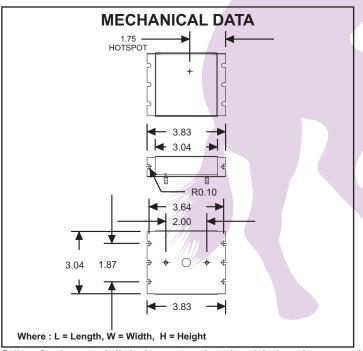

WIRING DIAGRAMS									
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN			
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	12 <u>+</u> 1"	-	12 <u>+</u> 1"	-			

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.