

SPECIFICATION SHEET: WH7-230-L

This Is An Original Product From Fulham Co., Inc


Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

REFER TO LAMP LISTING

ELECTRICAL DATA

INPUT VOLT: 230V ± 10%,	50/60Hz	1						
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS LINE CURRE		BALLAST FACTOR	EFFICACY FACTOR			
F60T12HO	1	78	0.37	0.89	1.14			
CFT96W	1 //	103	0.47	0.87	0.84			
CFT96W	2	213	0.96	1.02	0.48			
F54T5HO	4	197	0.89	0.82	0.42			
F96T12VHO	1 ///	205	0.93	0.98	0.48			
POWER FACTOR		> 0.9						
THD	< 35%							
EMI/RFI COMPLIANCE		FCC PART 18-A						
SOUND RATING		"A"						
BALLAST TYPE			INSTANT STAF	RT				
VOLTAGE TRANSIENTS			ANSI C82.11 - 1	993				
INPUT/PROTECTION			FUSE					
OUTPUT/PROTECTION			-					
MIN. OPERATING TEMP			- 30 °C ('- 20 °	F)				
MAX. CASE TEMP			70 °C (158 ° F	-)				
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							

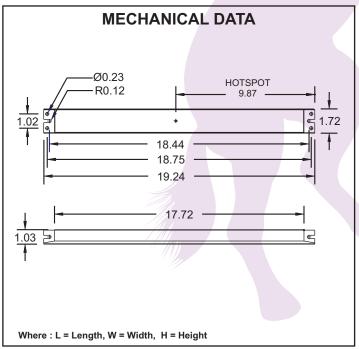

WIRING DIAGRAMS							
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN	
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-	

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



SPECIFICATION SHEET: WH7-230-L

This Is An Original Product From Fulham Co., Inc


Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

=		⊐∏≡
	F60T12HO	

ELECTRICAL DATA

INPUT VOLT: 230V ± 10%, 50/60Hz							
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR		
MaxLight 25W CE 0.3	4	100	0.47	0.82	0.82		
LightTech 10/100 R	2	202	0.93	0.88	0.43		
LightTech 20/120 R	1 //	127	0.59	0.88	0.70		
LightTech 20/120 R	2	203	0.93	0.76	0.37		
LightTech 33/160 R	1///	133	0.61	0.69	0.52		
LightTech 26/180 R	1///	199	0.91	0.96	0.48		
POWER FACTOR			> 0.9				
THD	< 37%						
EMI/RFI COMPLIANCE		FCC PART 18-A					
SOUND RATING		"A"					
BALLAST TYPE			INSTANT STA	RT			
VOLTAGE TRANSIENTS			ANSI C82.11 - 1	1993			
INPUT/PROTECTION			FUSE				
OUTPUT/PROTECTION			-				
MIN. OPERATING TEMP			- 30 °C ('- 20	⁰ F)			
MAX. CASE TEMP	70 °C (158 °F)						
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR						

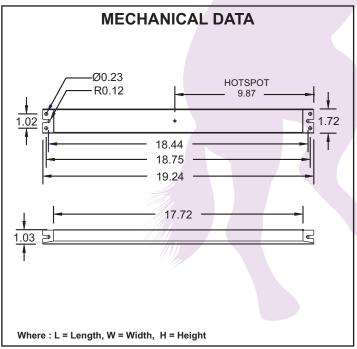

WIRING DIAGRAMS							
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN	
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-	

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.