

## SPECIFICATION SHEET: WH22-277-C

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


**High Power Factor, Light Weight,** 

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

## **ELECTRICAL DATA (277 APPLICATIONS)**

INPUT VOLT: 277V ± 10%	, 50/60Hz									
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR					
CFT13W	2	25	0.10	0.8	3.3					
		4								
	A									
POWER FACTOR	> .9									
THD	< 30.0 %									
CURRENT CREST FACTOR	< 2.1									
EMI/RFI COMPLIANCE	FCC PART 18-A									
SOUND RATING	"A "									
BALLAST TYPE	INSTANT START									
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993									
INPUT/PROTECTION	FUSE									
OUTPUT/PROTECTION			-							
MIN. OPERATING TEMP	- 30 °C ('- 20 °F)									
MAX. CASE TEMP			70 °C (158 °F)							
ENERGY STAR 4.0			_							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 O R 2 OUTDOOR									

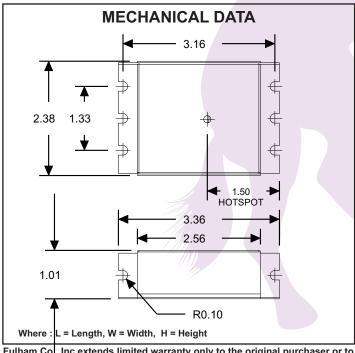

WIRING DIAGRAMS										
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN				
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	12 <u>+</u> 1"	-	12 <u>+</u> 1"	-				

FOR WIRING DIAGRAM. PLEASE REFER TO FULHAM'S CATALOG

NOTE: This Ballast Must Be Grounded

Fulham Col, Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.