

ELFH Fixed Optics LED Emergency Unit



ILLUMINATION

- Long life, efficient, ultra bright white LED lamp heads and 12 LEDs per head.
- Two fixed LED lamp heads provide optimal center-to-center spacing.
- High performance, chrome-plated metallized reflector and plastic lens for optimal light distribution.

ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- Suitable for wall or ceiling mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA Listed for damp locations (0°C – 40°C).

DIMENSIONS

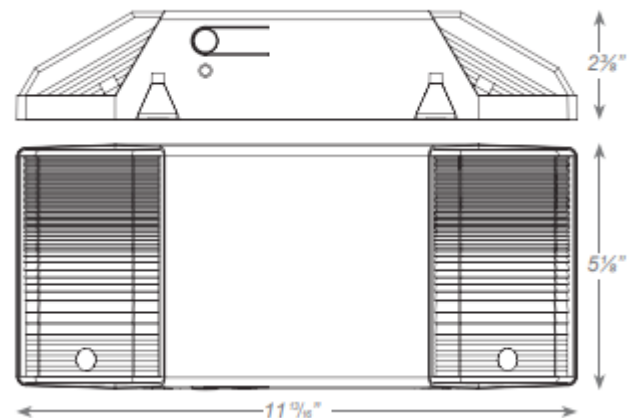

ELFH Ordering Information

Model	Housing Color
ELFH	Blank- White B- Black

Order Example:
ELFHB