

# XR Rounded Compact LED Exit Sign



## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.


## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

## DIMENSIONS

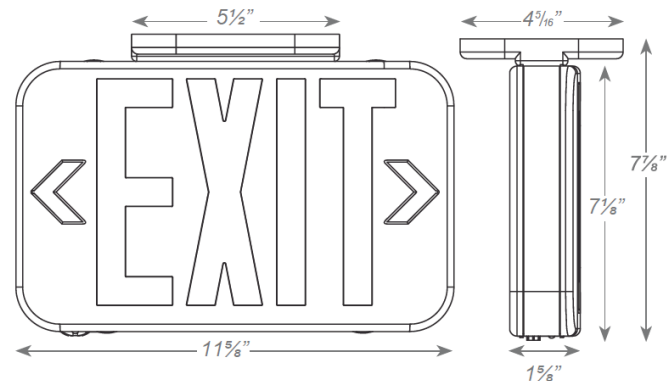

## XR Ordering Information

Model	No of Faces	Letters	Housing	Battery
XEL	SD - Dual	R - Red G - Green	W - White B - Black	Blank - AC Only E - Battery Backed

Order Example:  
**XRSDRWE**