

LED InstantFit Lamps with EasySmart Technology

14T8/48-4000 IF EasySmart 10/1

Philips InstantFit lamp with EasySmart technology means easy upgrade to smart lighting system without re-wiring the fixtures. 2.4GHz mesh networking techology allows integration with a variety of control devices wirelessly, such as sensor and switch, to achieve even more energy saving and enhance flexibility in your space. Through dimming, occupancy sensing and/or daylight harvesting, lamps deliver 50% or more energy saving thanks to EasySmart technology.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Industrial
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
B50L70	50000 h
Light Technical	
Color Code	841 [CCT of 4100K (841)]
Initial lumen (Nom)	2100 lm
Luminous Flux (Rated) (Nom)	2100 lm
Correlated Color Temperature (Nom)	4000 K
Color Consistency	<6
Color Rendering Index (Nom)	82

LLMF At End Of Nominal Lifetime (Nom)	70 %	
Operating and Electrical		
Input Frequency	50 to 60 Hz	
Power (Rated) (Nom)	14 W	
Lamp Current (Max)	240 mA	
Lamp Current (Min)	130 mA	
Starting Time (Nom)	0.5 s	
Warm Up Time to 60% Light (Nom)	0.5 s	
Power Factor (Nom)	0.9	
Voltage (Nom)	120-277, 347 V	
Temperature		
T-Ambient (Max)	45 °C	
T-Ambient (Min)	-20 °C	


Datasheet, 2018, January 29 data subject to change

LED InstantFit Lamps with EasySmart Technology

T-Storage (Max)	65 °C	
T-Storage (Min)	-40 °C	
T-Case Maximum (Nom)	40 °C	
Controls and Dimming		
Dimmable	Wireless Dim	
Mechanical and Housing		
Product Length	1200 mm	
Approval and Application		
Energy Saving Product	Yes	
Energy Efficiency Label (EEL)	Not applicable	


Approbation Marks	UL certificate RoHS compliance
Product Data	
Order product name	14T8/48-4000 IF 10/1 EasySmar
EAN/UPC - Product	046677466473
Order code	466474
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001281304
Net Weight (Piece)	0.230 kg
Model Number	9290012813


Dimensional drawing

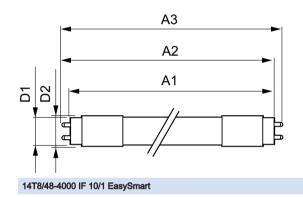



Photometric data

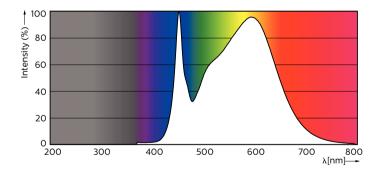




LEDtube 1200mm 14W G13 2000lm

LEDtube 1200mm 14W G13 840 2100lm


LED InstantFit Lamps with EasySmart Technology


Photometric data



Calculat Fluorences 4.5 Philips Lighting B.V. Page 51

Lifetime

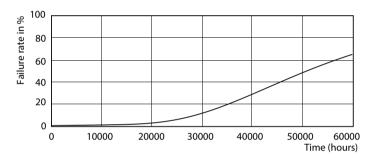

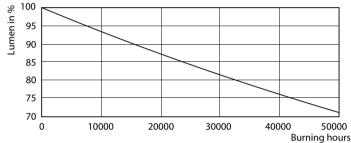

LEDtube 1200mm 14W G13 2000lm

LEDtube 1200mm 14W G13 2000lm

