



# LED A19-A21

## 5A19/PER/927-22/P/E26/WG 6/1FB T20

Philips A19/A21 LED lamps are the smart alternative to standard incandescent. The unique lamp design provides omni-directional light with excellent dimming performance.

### Product data

General Information	
Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	5-40W

Light Technical	
Color Code	922-927 [ CCT of 2200K-2700K]
Beam Angle (Nom)	250 °
Initial lumen (Nom)	450 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2200-2700 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	5 W
Lamp Current (Nom)	55 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	65 °C


Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Finish	Frosted

Product Data	
XUCDM.COPY.Product.Title	5A19/PER/927-22/P/E26/WG 6/1FB T20
EAN/UPC - Product	046677479428
Order code	479428
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001940704
Net Weight (Piece)	0.084 kg

# LED A19-A21


## Dimensional drawing




Bulb A19 5-40W 450lm 2200-2700K E26 D

Product	D	C
5A19/PER/927-22/P/E26/WG 6/1FB T20	62.5 mm	111.5 mm


## Photometric data

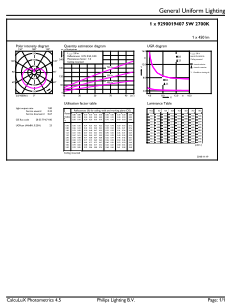

LEDBulb A19 E26 5-40W

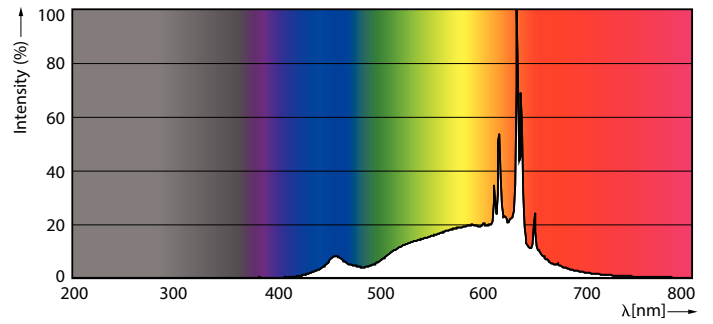



LEDBulb A19 E26 5-40W



LEDBulb A19 E26 5-40W

# LED A19-A21

## Lifetime

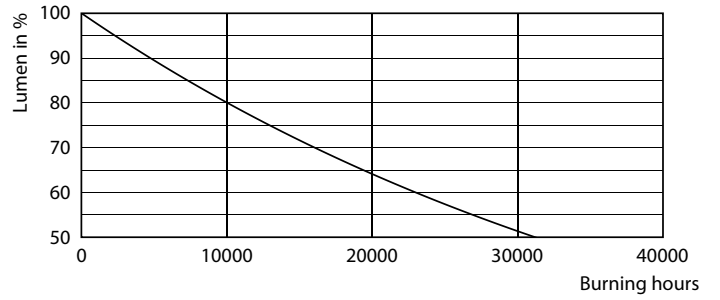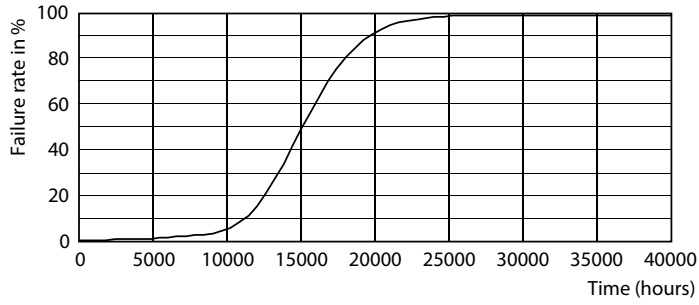

LEDBulb E26

LEDBulb E26

