



CorePro LED PL 4pin 2pin

5.5PL-C/LED/13V/830/IF5/P/4P 20/1

Philips LED T8 InstantFit Lamps are an ideal energy saving choice for existing linear fluorescent fixtures.

Product data

General Information	
Cap-Base	G24Q [G24q]
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
B50L70	50000 h

Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	150 °
Initial lumen (Nom)	550 lm
Luminous Flux (Rated) (Nom)	550 lm
Rated Beam Angle	150 °
Correlated Color Temperature (Nom)	3000 K
Color Consistency	<6
Color Rendering Index (Nom)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	25000-100000 Hz
Power (Rated) (Nom)	5.5 W
Lamp Current (Max)	280 mA
Lamp Current (Min)	130 mA

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	14-60 V

Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	70 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Product Length	100 mm


Approval and Application	
Energy Saving Product	Yes
Approbation Marks	UL certificate RoHS compliance

CorePro LED PL 4pin 2pin

Product Data	
Order product name	5.5PL-C/LED/13V/830/IF5/P/4P 20/1
EAN/UPC - Product	046677532444
Order code	532440
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20

Material Nr. (12NC)	929001885804
Net Weight (Piece)	0.058 kg
Model Number	9290018858



Dimensional drawing

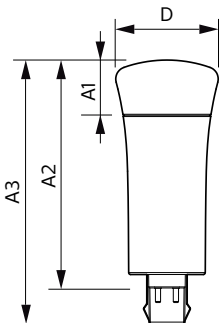

PLED PLC-V 5-13W 550lm 3000K G24q


Product	D	A1	A2	A3
5.5PL-C/LED/13V/830/IF5/P/4P 20/1	45.7 mm	24.6 mm	101.6 mm	117.6 mm

Photometric data

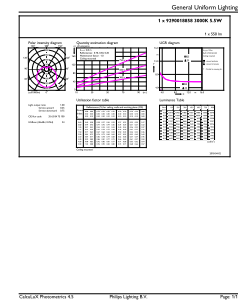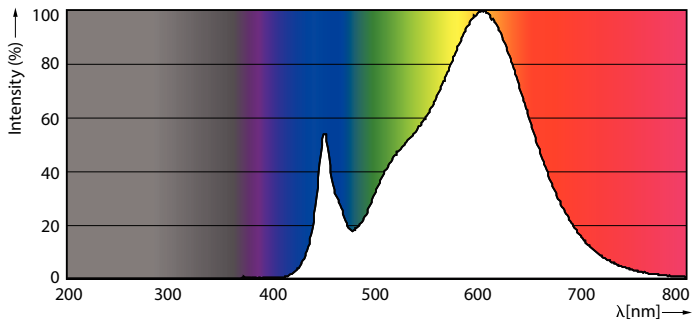

LEDtube PLC 13V 5.5W G24Q 830 15D ND



LEDtube PLC 13V 5.5W G24Q 830 15D ND




LEDtube PLC 13V 5W GX23-2 827 15D ND

CorePro LED PL 4pin 2pin


Lifetime

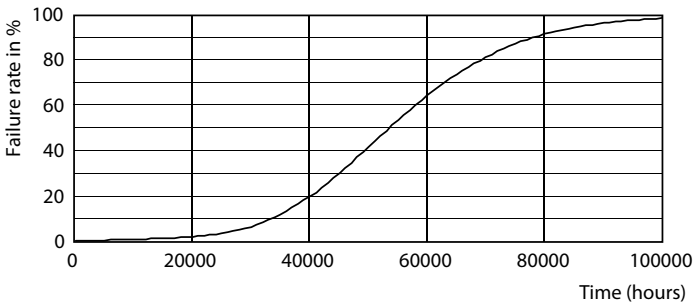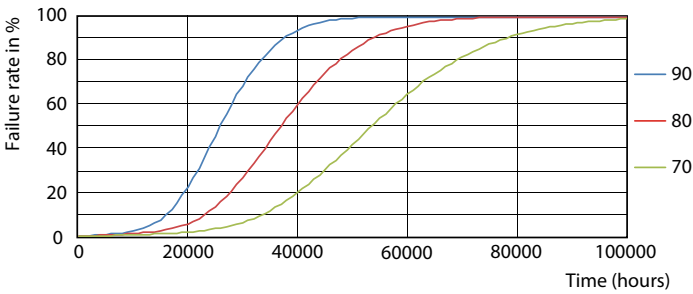


LEDtube PLC 13H 5W GX23-2 827 15D ND

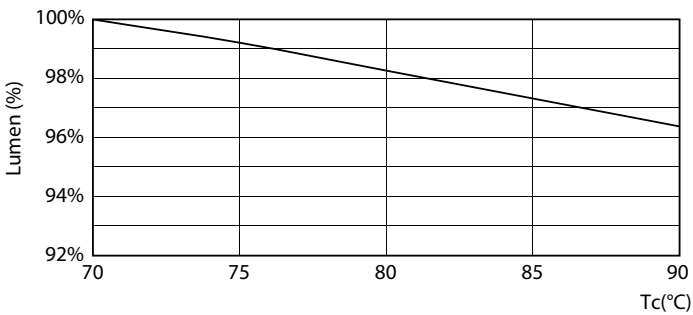

LEDtube PLC 13H 5W GX23-2 827 15D ND

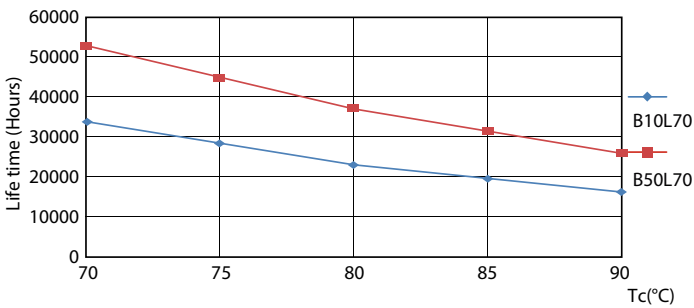

LEDtube PLC 13V 5.5W G24Q 827 15D ND

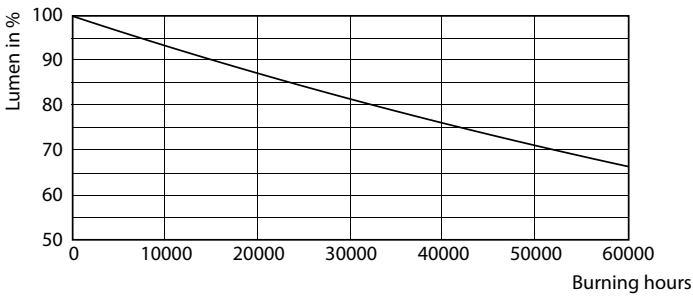

LEDtube PLC 13H 5W GX23-2 827 15D ND

LEDtube PLC 13H 5W GX23-2 827 15D ND

CorePro LED PL 4pin 2pin

