



TrueForce High Lumen PAR

25.5PAR30L/PER/830/S15/ND/120-277V 6/1FB

Philips LED TrueForce PAR high lumen lamps are the perfect transition from CDM lamps to LED.

Product data


General Information			
Base	E26 [Single Contact Medium Screw]	Power (Rated) (Nom)	25.5 W
EU RoHS compliant	Yes	Lamp Current (Max)	230 mA
Nominal Lifetime (Nom)	25000 h	Lamp Current (Min)	115 mA
Switching Cycle	50000X	Wattage Equivalent	75 W
Technical Type	25.5-75W	Starting Time (Nom)	0.5 s
Light Technical		Warm Up Time to 60% Light (Nom)	0.5 s
Color Code	830 [CCT of 3000K]	Power Factor (Nom)	0.8
Beam Angle (Nom)	15 °	Lamp Current at 277V	115 mA
Initial lumen (Nom)	2500 lm	Voltage (Nom)	120-277 V
Luminous Flux (Rated) (Nom)	2500 lm	Temperature	
Luminous Intensity (Nom)	16000 cd	T-Case Maximum (Nom)	95 °C
Color Designation	White (WH)	Controls and Dimming	
Correlated Color Temperature (Nom)	3000 K	Dimmable	No
Luminous Efficacy (rated) (Nom)	98.00 lm/W	Approval and Application	
Color Consistency	<4	Suitable For Accent Lighting	Yes
Color Rendering Index (Nom)	80	Product Data	
LLMF At End Of Nominal Lifetime (Nom)	70 %	XUCDM.COPY.Product.Title	25.5PAR30L/PER/830/S15/ND/120-277V 6/1FB
Operating and Electrical			
Input Frequency	50 to 60 Hz		

TrueForce High Lumen PAR

EAN/UPC - Product	046677534646
Order code	534644
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6

Material Nr. (12NC)	929001917004
Net Weight (Piece)	0.290 kg



Dimensional drawing



PAR30L 27.5-W 2300lm 15D 3000K E26 ND


Product
25.5PAR30L/PER/830/S15/ND/120-277V 6/1FB

Photometric data

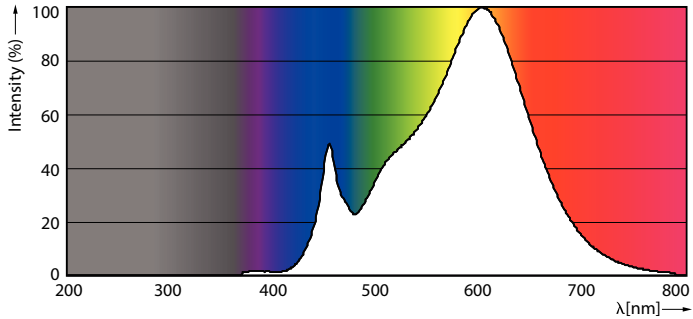

LEDspot PAR30 1FB


LEDspot 25,5 PAR30L 830 S15




LEDspot 25,5 PAR30L 830 S15

TrueForce High Lumen PAR

Lifetime

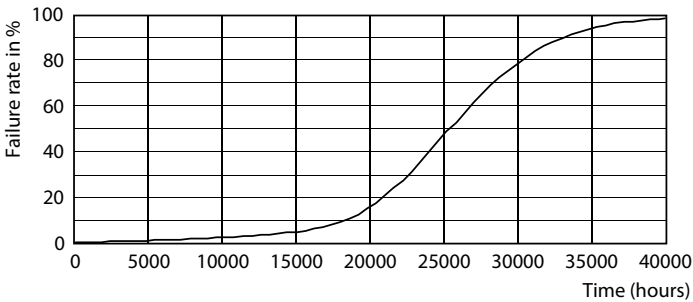

LEDspot PAR30 1FB

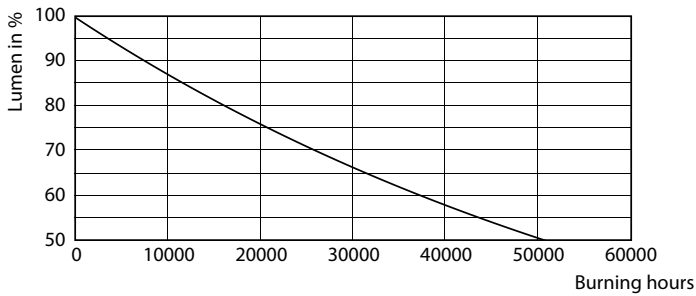

LEDspot PAR30 1FB

