

LED A15

3.8A15/PER/927-922/CL/G/E26/WGX1FB T20

Philips A15 LED Lamps offer energy saving ambience with an elegant effect. Their unique design provides light in all directions, giving lighting designers a long life alternative to standard incandescent sources.

Product data

General Information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Technical Type	3.8-40W

Light Technical	
Color Code	927-922 [CCT of 2700K-2200K]
Initial lumen (Nom)	350 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2700-2200 K
Luminous Efficacy (rated) (Nom)	92.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	3.8 W
Lamp Current (Nom)	42 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.75
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	50 °C


Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Finish	Clear

Product Data	
XUCDM.COPY.Product.Title	3.8A15/PER/927-922/CL/G/E26/WGX1FB T20
EAN/UPC - Product	046677549381
Order code	549386
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002208304
Net Weight (Piece)	0.020 kg

LED A15



Dimensional drawing



BulbA15120V3.8-40W350lm2700-2200KE26DCL


Product	D	C
3.8A15/PER/927-922/CL/G/E26/WGX1FB T20	47 mm	86 mm

Photometric data

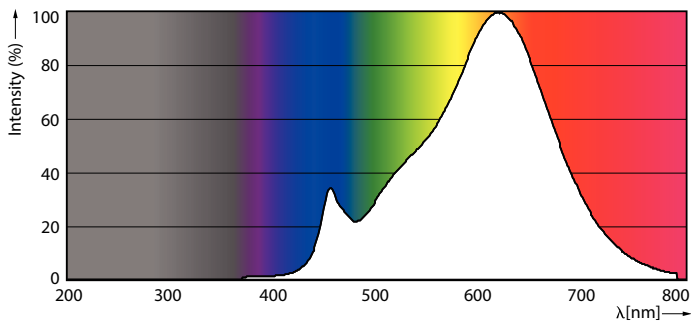

LEDbulb CL,FR 927

LEDbulb 927 FR,CL




Technical Parameters 01 Page Lighting 01 Page 11

LEDbulb 40W E26 A15 927 CL

LED A15

Lifetime

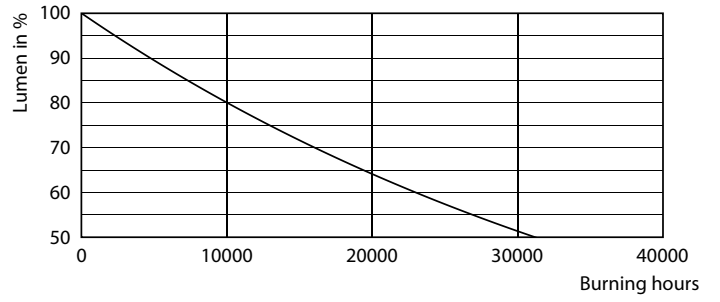

LEDbulb_15K LED

LEDbulb_15K LMP

