



LED A19-A21

8.8A19/PER/950/P/E26/DIM 6/1FB T20

Philips A19/A21 LED lamps are the smart alternative to standard incandescent. The unique lamp design provides omni-directional light with excellent dimming performance.


Product data

General Information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	8.8-60W
Light Technical	
Color Code	950 [CCT of 5000K]
Beam Angle (Nom)	250 °
Initial lumen (Nom)	800 lm
Luminous Flux (Rated) (Nom)	800 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	8.8 W
Lamp Current (Nom)	80 mA
Wattage Equivalent	60 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	90 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Product Data	
XUCDM.COPY.Product.Title	8.8A19/PER/950/P/E26/DIM 6/1FB T20
EAN/UPC - Product	046677550455
Order code	550459
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002036304
Net Weight (Piece)	0.060 kg

LED A19-A21



Dimensional drawing



Bulb A19 120V 8.8-60W 800lm 5000K E26 D

Product	D	C
8.8A19/PER/950/P/E26/DIM 6/1FB T20	62.5 mm	111.5 mm


Photometric data



©2019 Philips Lighting B.V. Philips Lighting B.V. Page 1/4

40 60 75 100W E26 A19 A21 Frosted

60W E26 A19 950 Frosted

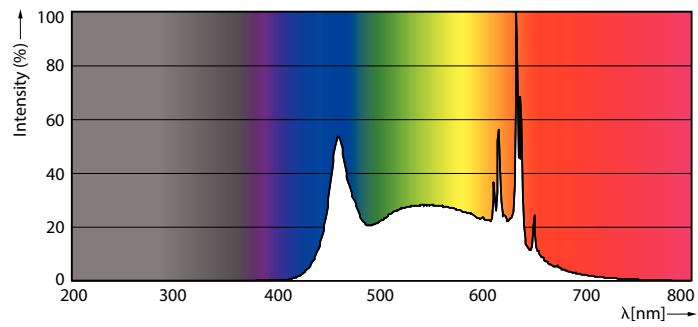


60W E26 A19 950 Frosted

LED A19-A21

Lifetime



LEDbulb_15K LED

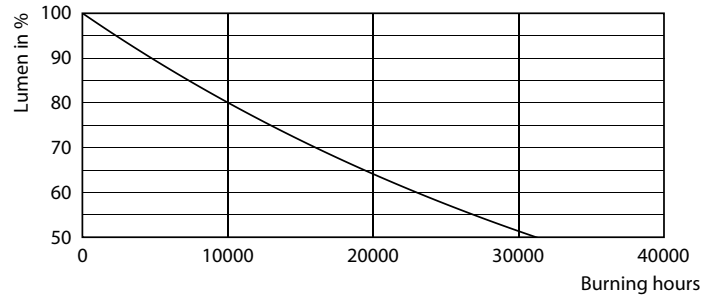

LEDbulb_15K LMP

