



LED A19-A21

12.2A21/PER/930/P/E26/DIM 6/1FB T20

Philips A19/A21 LED lamps are the smart alternative to standard incandescent. The unique lamp design provides omni-directional light with excellent dimming performance.


Product data

General Information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	12.2-75W
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	250 °
Initial lumen (Nom)	1100 lm
Luminous Flux (Rated) (Nom)	1100 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	12.2 W
Lamp Current (Nom)	115 mA
Wattage Equivalent	75 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	90 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Product Data	
XUCDM.COPY.Product.Title	12.2A21/PER/930/P/E26/DIM 6/1FB T20
EAN/UPC - Product	046677550486
Order code	550483
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002036504
Net Weight (Piece)	0.174 kg

LED A19-A21


Dimensional drawing

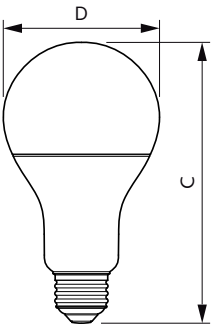


A21 120V 12.2-75W 1100lm 3000K E26 D

Product	D	C
12.2A21/PER/930/P/E26/DIM 6/1FB T20	78 mm	140 mm


Photometric data



40 60 75 100W E26 A19 A21 Frosted

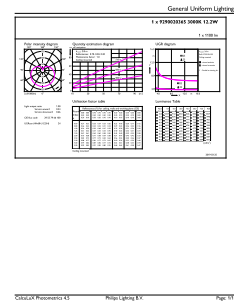

75W E26 A21 930 Frosted

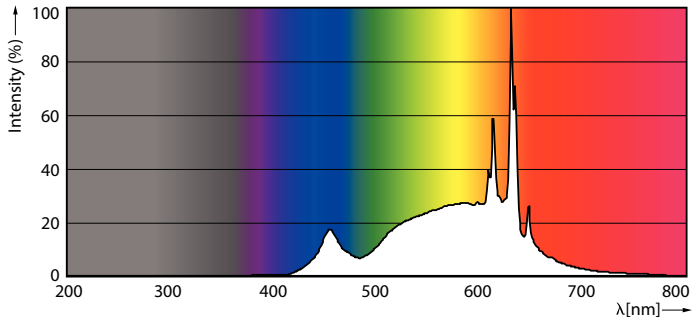


75W E26 A21 930 Frosted

LED A19-A21

Lifetime



LEDbulb_15K LED

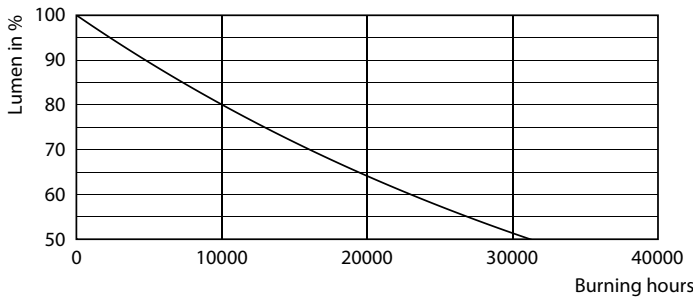

LEDbulb_15K LMP

