

LED Glass HID lamps

14GC/LED/850/ND E26 BB 6/1

Philips Glass HID lamps offer you an easy, short-payback LED solution to replace High Intensity Discharge (HID) lamps. Thanks to our High-Power LED filament technology, this new generation of indoor/outdoor glass lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while providing instant savings with a low initial investment. They are designed to have the same aesthetics, lamp size and light distribution as the HID lamps they are replacing, so the upgrade to LED is easier than ever!

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	25,000 hour(s)
Switching Cycle	15,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	2,000 lumen
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	142.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	14 W
Lamp Current (Nom)	126.5 mA
Wattage Equivalent	70 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	123 °F

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass

LED Glass HID lamps


Bulb Shape	ED75 [ED 75mm]

Material Nr. (12NC)	929003507604
Full product name	14GC/LED/850/ND E26 BB 6/1
EAN/UPC - Case	50046677578836
EAN/UPC - Product/Case	046677578831

Product Data


Order product name	14GC/LED/850/ND E26 BB 6/1
Order code	578831
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6

Dimensional drawing




Product	D	C
14GC/LED/850/ND E26 BB 6/1	76 mm	183 mm


Photometric data



Light Distribution Diagram - 14GC/LED/850/ND E26 BB 6/1




General uniform lighting - 14GC/LED/850/ND E26 BB 6/1

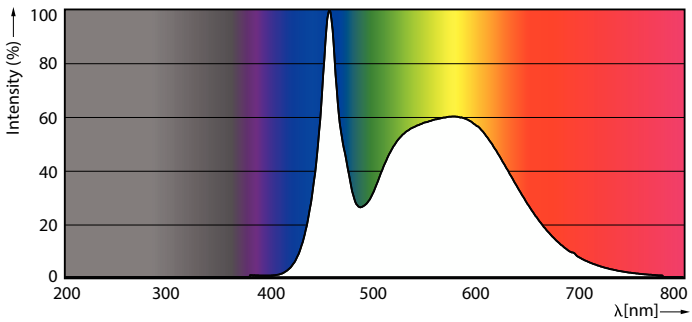


Spectral Power Distribution Colour - 14GC/LED/850/ND E26 BB 6/1

LED Glass HID lamps

Lifetime

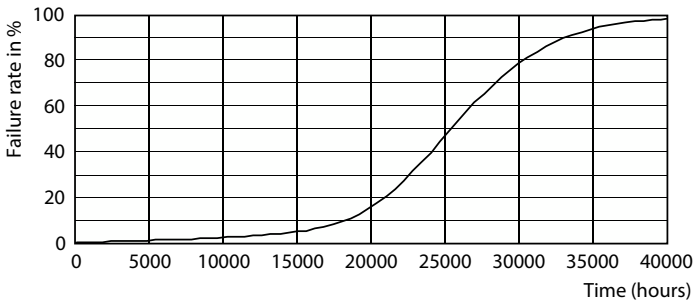

Life Expectancy Diagram - 14GC/LED/850/ND E26 BB 6/1

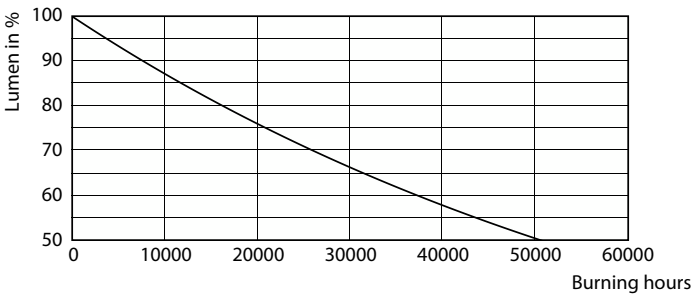

Lumen Maintenance Diagram - 14GC/LED/850/ND E26 BB 6/1

© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.