

This economical linear LED washdown fixture is ideal for canopies, loading docks, tunnels, stairwells and other hard-to-reach areas where relamping is difficult and costly.

Color: White

Weight: 8.3 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	50W
120V	0.44A	Color Temp	5000K (Cool)
208V	0.26A	Color Accuracy	82 CRI
240V	0.23A	L70 Lifespan	50,000
277V	0.19A	Lumens	5,849
Input Watts	49.10W	Efficacy	119.1 LPW

## Technical Specifications

### Listings

#### UL Listed:

Suitable for wet locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PRTHPOQN

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Construction

#### IP Rating:

Ingress Protection rating of IP65 for dust and water (suitable for damp locations only when

#### Housing:

Impact-resistant polycarbonate with stainless steel door clips. 1/2" opening/ drill out (drill out by customer) for conduit and bushing/cord entry.

#### Mounting:

Quick-mount, stainless steel snap on brackets supplied for surface mounting. V-Hook brackets supplied standard for suspending the fixture.

#### Lens:

Diffuse polycarbonate lens for low glare and maximum protection

#### Gaskets:

High-temperature silicone gaskets

#### Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

#### Maximum Ambient Temperature:

Suitable for use in 40°C (104°F)

#### Installation:

Tether Cables are provided for easy installation. Quick connector may be used for quick and easy wiring.

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Finish:

Formulated for high durability and long-lasting color

#### Other

#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Equivalency :

Equivalent to 32W 2 Lamp T8

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.44A, 208V: 0.26A, 240V: 0.23A, 277V: 0.19A

# SEAL4-50/D10



installed with Lightcloud Sensor)

## Technical Specifications (continued)

### Electrical


### Power Factor:

### THD:

99.4% at 120V, 97.3% at 277V

9.4% at 120V, 12.1% at 277V

## Dimensions

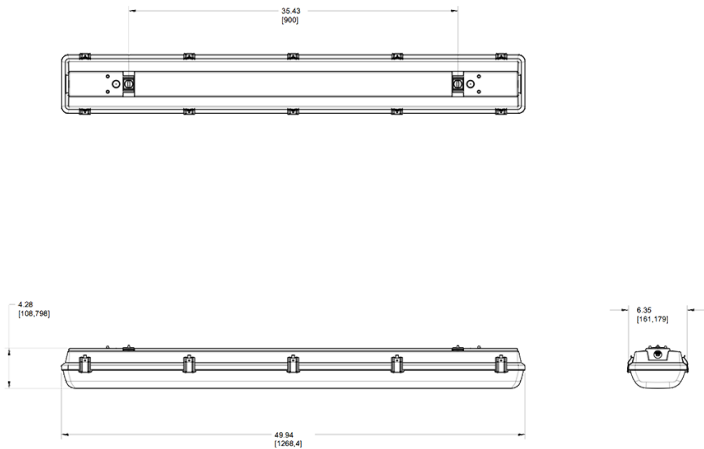

## Features

- Economical linear washdown solution
- Impact resistant polycarbonate housing
- Diffuse polycarbonate lens for protection and minimal glare
- Quick mount solutions - surface & suspended
- 0-10V dimming

## Ordering Matrix

Family	Length	Wattage	Color Temp	Driver	Options
SEAL	4 8	— 25 = 25W 50 = 50W 100 = 100W	Blank = 5000K (Cool) N = 4000K (Neutral)	/D10 = 0-10V Dimming 120-277V	Blank = No Option /LC = Lightcloud® Controller /LCS = Lightcloud® Sensor 120-277V <sup>1</sup>

<sup>1</sup> Suitable for damp locations only.