
## SATCO NUVO

Project Name

Location Prepared By

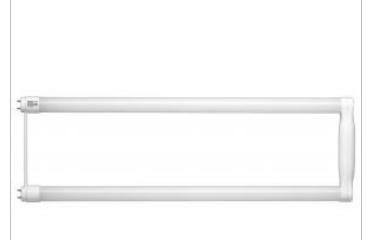

## **SATCO S9930**

15T8U6/LED/22.5-830/BP

Notes

[uaaaa] 1929229191 114-51-50

General	
Status	Active
Watts	15
Volts	120V-277V
Ballast Type	Туре В
Shape	T8
Base	Medium Bi Pin
ANSI Base	G13
Nominal Length	22.5
Finish	Frosted
CCT (Kelvin)	3000
Temperature	Warm White
CRI	82
Lumens	1800
Beam Spread	220
Dimmable	Non-Dimmable
Hours Rated	50000
Lamp Type	U-Bend
Technology	LED
Electrical	
Ballasting Requirements	Ballast Bypass

Electrical		
Ballasting Requirements	Ballast Bypass	
Operating Frequency	50/60 Hz	
Power Factor	0.9	
Operating Temperature	-20C (-4F) to a maximum of +45C (+113F)	

Physical	
MOL	22.5
MOD	1
Leg Spacing	6

<b>Additional</b>	Informa	tion

Warranty 5 Year Limited - T8 LED Bulbs - Ballast Bypass

Compliance	
Safety Listing	cULus Classified
Location Rating	Damp
Energy Star	No
DLC Approved	Yes
DLC ID	PJM4D71J
California Status	Lawful for sale in California
Nevada Status	Lawful for sale in Nevada
RoHS Compliant	Yes
NSF Approved	Yes - Approved







