sengled

DesignerPro Series

LED BR40

Dimmable / Replaces 85W Incandescent



Benefits:

- Brings out the beauty and enhances color in products and architectural features
- Will not fade colors (No UV Light)
- Long life = Low maintenance costs
- Low heat generation – great for temperature-sensitive display lighting
- Dynamic reds and natural skin tones
- Even, consistent dimming down to 5%

Features:

- Exceptional color rendering – CRI 93
- High efficacy rate – up to 65 LPW
- RoHS compliant with no lead or mercury
- This device complies with part 15 of the FCC Rules
- Durable, shatter resistant construction

Energy Usage	19 Watts
Lumens	1170
CRI	93
R9/R13 Value	up to 58/92
CCT	2700/3000K
Beam Angles	110°
Efficacy	up to 65 LPW
Base Type	E26
Voltage	120V
Dimming	TRIAC
Classification	Damp Rated
Operating Temperature	-4 to 104°F
Power Factor	0.9

Applications:

- Track lights, recessed downlights
- General, area lighting
- Great for high ceilings
- Floodlighting
- Great for restaurants, retail, hospitality, housing, multifamily senior care, offices and other commercial segments



Color:

- Strict LED binning for consistent CCTs across all lamps
- Available in 2700K & 3000K CCT
- High CRI 93
- High R9 58 (Reds)
- High R13 92 (Skin Tones)

HIGH CRI **93**
R9 **58**
R13 **92**

c UL us LISTED

RoHS

ENERGY STAR

5 YEAR WARRANTY

LIFE: **25,000 HOURS**

LM 79 | LM 80 | TM 21 | IES

© 2018 Sengled USA. C00137 02/2018


*Information provided is subject to change without notice. CRI values may fluctuate slightly from product to product.

sengled

DesignerPro Series


LED BR40

ILLUMINANCE & CANDELA DISTRIBUTION




120° | 2700K

Diameter	Footcandles
10.8	36
21.6	9
32.3	4
43.1	2
53.9	1



120° | 2700K

Degree	Candela
0	323
5	321
15	312
25	292
35	264
45	228

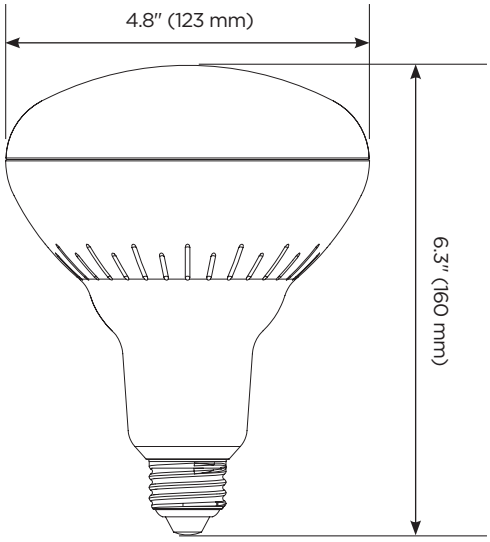

Weight: **0.71 lb / 320 g**

Type	Voltage	Wattage	Base	CBCP	Light Output	Color Temp.	CRI	Beam Angle	Equal	Product Description	Product Number	Master Carton Quantity
	(V)	(W)		(cd)	(lm)	(k)	(Ra)	◁°				(PCS)
BR40	120	19	E26	323	1170	2700	93	110	85	DP0519BR40E26D927G1110CB1W	1102350017	16
BR40	120	19	E26	323	1250	3000	93	110	85	DP0519BR40E26D930G1110CB1W	1102350049	16

© 2018 Sengled USA. C00137 02/2018
*Information provided is subject to change without notice. CRI values may fluctuate slightly from product to product.