

M3912CK-6EU-F

APPLICATION and PERFORMANCE SPECIFICATION

Description: Mini Square Case - electronic low frequency square wave ballast for 39W metal halide lamps

- Line Voltage: 120vac , $\pm 10\%$, 50/60Hz
- Microprocessor controlled
- RoHS Compliant
- Mounting type: Feet - side lead exit
- Resonance Start
- Active power factor correction
- Abnormal operation shutdown circuit: Line voltage must be reset

*60 Hz data

Lamp		Volts	Input Watts	Nominal Line Amps	Power Factor	Ballast Factor	Harmonic Total	Crest Factor
ANSI Type	#							
M130/C130	1	120	45	0.38	> 95%	1.00	<6%	<1.5

Ballast Order Code: 188293

Performance:

- Meets ANSI Standard C82.14-2006
- Meets ANSI Standard C62.41-1991
- Meets FCC Part 18C for EMI & RFI (non-consumer)
- EOL Protection

Safety:

- No PCBs
- cUL_{US} Listed (Outdoor Type 1)
- Thermal Protection

Application:

- Minimum Starting Temperature: $-15^{\circ}\text{C}/+5^{\circ}\text{F}$
- Maximum Case Temperature: $75^{\circ}\text{C}/167^{\circ}\text{F}$
- Sound Rated: A
- Remote Mounting: 10 feet

Each lamp's lead wires must be run in a separate minimum 1/2" ID conduit from the input leads to achieve good EMI performance and maximum remote capabilities. Individual, unbundled lead wires must be used for extension wiring using wire types SF-2 or SFF-2 or equivalent. Power cords and MC cables are not acceptable extension wiring methods.



Physical Parameters

- | | Inches/Metric |
|-------------------------------|---------------|
| • Overall Length: | 3.74"/95.1mm |
| • Width: | 2.98"/75.6mm |
| • Height: | 1.21"/30.6mm |
| • Weight: | 10 oz |
| • Lead lengths: All | 10"/254mm |
| • Lead stripping:(Tinned) All | .375"/9.53mm |

Warranty:

Universal Lighting Technologies warrants to the purchaser that each electronic ballast will be free from defects in material or workmanship for a period of 3 years from date of manufacture when properly installed and under normal conditions of use. The normal operation of 4000 hr./yr. is used for the warranty period. Longer operating times will adjust the warranty period accordingly. For extended warranty periods greater than 36 months, call 1-800 BALLAST for fixture testing instructions.

Manufactured in Japan

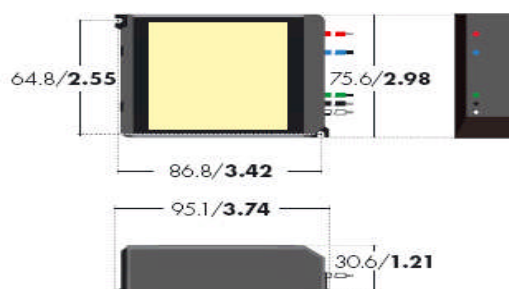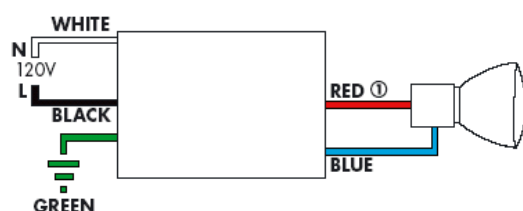

Reprinted by BulbsDepot.com