


DIMENSIONS:

Ø16"(OD) x 10"(H)

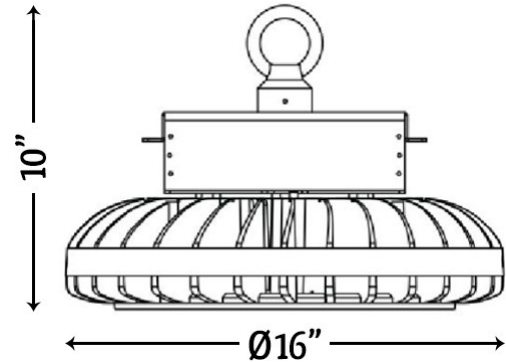

UHB-360-CW-480V

LED UFO HIGH BAY FIXTURES

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 480V
- Wattage: 360W
- Other wattages: 100W, 150W, 300W
- Power factor: >0.9
- Efficacy: 125LM/W

HOUSING SPECIFICATIONS:

- ACD12 aluminum heat sink, SUS black plate
- Outdoor powder coat finish (Black)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- Prismatic PC lens cover

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UHB-360-CW-480v	360W	480V	46000 LM	5000K



MODEL	DESCRIPTION
UHB-SMB-300	OPTIONAL SURFACE MOUNT BRACKET FOR 300W & 360W FIXTURES

LIGHTING SPECIFICATIONS:

- LED type/brand: Philips Lumileds
- Total lumens: 46000LM
- Color temperature: 5000K
- Color rendering index: >82
- Beam angle: 90°

WARRANTY: 5 years




UHB-360-CW-480V

LED UFO HIGH BAY FIXTURES

CERTIFICATIONS: UL, DLC



PHOTOMETRICS:

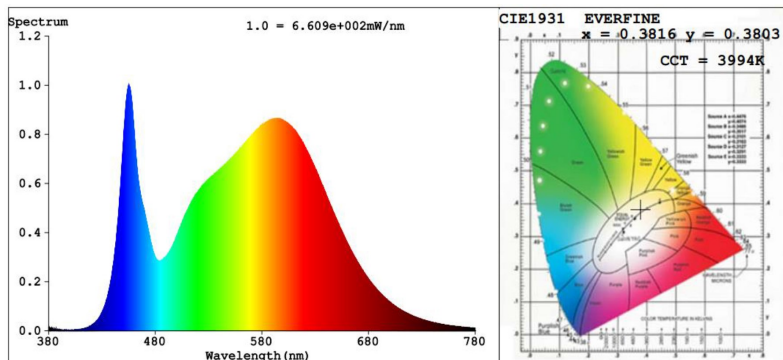

Illuminance at a Distance			
	Center Beam fc	Beam Width	
17.0ft	75.8 fc	33.7 ft	33.2 ft
34.0ft	18.9 fc	67.4 ft	66.3 ft
51.0ft	8.4 fc	101.1 ft	99.5 ft
68.0ft	4.7 fc	134.8 ft	132.7 ft
85.0ft	3.0 fc	168.5 ft	165.9 ft
102.0ft	2.1 fc	202.2 ft	199.0 ft
Vert. Spread: 89.5° Horiz. Spread: 88.6°			

